

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 July 2004 (15.07.2004)


PCT

(10) International Publication Number  
**WO 2004/059288 A2**

- (51) International Patent Classification<sup>7</sup>: **G01N**
- (21) International Application Number:  
PCT/US2003/041022
- (22) International Filing Date:  
22 December 2003 (22.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/435,601 20 December 2002 (20.12.2002) US  
PCT/US03/40974 19 December 2003 (19.12.2003) US  
PCT/US03/40591 19 December 2003 (19.12.2003) US  
PCT/US03/40519 19 December 2003 (19.12.2003) US  
PCT/US03/40518 19 December 2003 (19.12.2003) US  
PCT/US03/40880 22 December 2003 (22.12.2003) US
- (71) Applicant (*for all designated States except US*): **DAKO-CYTOMATION DENMARK A/S [DK/DK]**; Produktionsvej 42, DK-2600 Glostrup (DK).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **FEINGOLD, Gordon [US/US]**; 5242 Austin Road, Santa Barbara, CA 93111 (US). **KEY, Marc [US/US]**; 290 Saddle Lane, Ojai, CA 93023 (US).
- (74) Agent: **SANTANGELO, Luke**; Santangelo Law Offices, P.C., 125 South Howes, 3rd floor, Fort Collins, CO 80521 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: ISOLATED COMMUNICATION SAMPLE PROCESSING SYSTEM AND METHODS OF BIOLOGICAL SLIDE PROCESSING

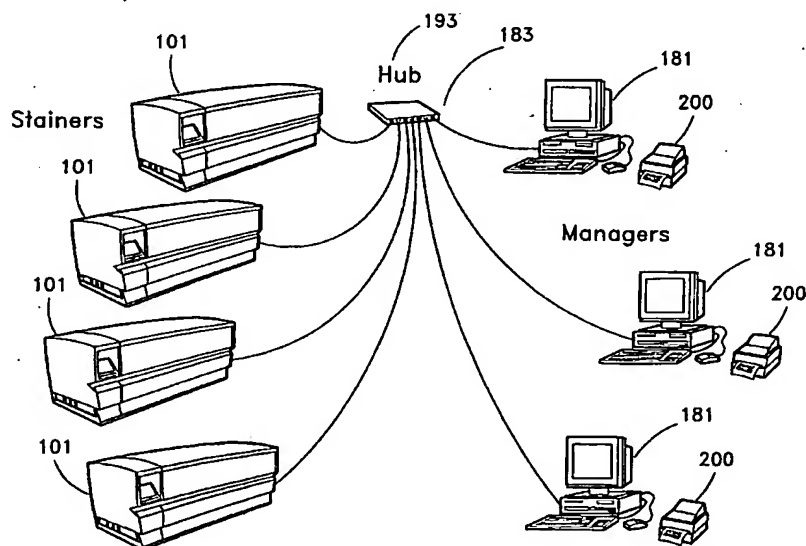

(57) Abstract: A sample processing system 101 that may be automated and methods are disclosed where a number of sample processing systems 101, such as stainer, may be connected to a number of separate full function computers 181 through a stainer network 183 that may be isolated from other communication traffic. A network configuration may permit scalability and addressability so that additional sample processing systems 101, additional separate full function computers 181, and additional other devices such as label printers 200 may be easily added to the system. One or more remote information links 171 may be provided so that information transfer on a continuous or perhaps constant basis can be accommodated.



(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— without international search report and to be republished upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## ISOLATED COMMUNICATION SAMPLE PROCESSING SYSTEM AND METHODS OF BIOLOGICAL SLIDE PROCESSING

### 5 TECHNICAL FIELD

This application relates to the field of sample processing systems and methods of transferring information relative to processing of samples or the process system. The present invention may be directed to the automated processing, treatment, or even  
10 staining of samples arranged on carriers, such as slides, and in some embodiments, directed to interruptible processing of samples and carriers. Embodiments may further relate to control systems for sample processing and data input, acquisition, maintenance, and retrieval for sample processing. Applications to which the present invention may especially relate include immunohistochemistry, in-situ hybridization, fluorescent in-situ  
15 hybridization, special staining, and cytology, as well as potentially other chemical and biological applications.

### BACKGROUND

20 Sample processing in immunohistochemical (IHC) applications and in other chemical and biological analyses may require one or a number of various processing sequences or protocols as part of an analysis of one or more samples. The sample processing sequences or protocols may be defined by the individual or organization requesting an analysis, such as a pathologist or histologist of a hospital, and may be  
25 further defined by the dictates of a particular analysis to be performed.

In preparation for sample analysis, a biological sample may be acquired by known sample acquisition techniques and may comprise, for example in IHC applications, tissues generally or even in some applications one or a plurality of isolated cells, such as  
30 in microarray samples, and may be presented on a sample carrier including but not limited to microscope slides. Furthermore, the sample may be presented on the carrier variously and potentially in some form of preservation. As one example, a sample such as a layer or slice of skin may be preserved in formaldehyde and presented on a carrier with one or more paraffin or other chemical layers infiltrating the sample.

35

Immunohistochemistry, histological, or histopathology applications, for example, may require processing sequences or protocols that comprise steps such as deparaffinization, target retrieval, reagent application, and staining, especially for in-situ hybridization (ISH) techniques. In some applications, these steps may have been performed manually, potentially creating a time-intensive protocol and necessitating personnel to be actively involved in the sample processing. Even when performed automatically, there have been inefficiencies in such systems. Attempts have been made to automate sample processing to address the need for expedited sample processing and a less manually burdensome operation. However, such previous efforts may have not fully addressed certain specific needs for an automated sample processing system. Previous efforts to automate sample processing may be deficient in several aspects that prevent more robust automated sample processing, such as: the lack of sufficient computer control and monitoring of sample processing; the lack of information sharing for processing protocol and processing status, especially for individual samples; the lack of practical information input and process definition entry capabilities; the lack of diagnostic capabilities; and the lack of real-time or adaptive capabilities for multiple sample batch processing.

Past efforts at automated sample processing for samples presented on carriers such as slides, such as US Patent No. 6352861 and US Patent No. 5839091, have not afforded the various advantages and other combinations of features as presented herein.

One of the various aspects that may be significant to users of automated process systems is that of permitting a variety of communication transfers to, from, and within a system that can be easily expanded while assuring the integrity of the process and process information. These aspects can also be important when allowing changes to the processing while it is ongoing. In addition, operators often have needed to be physically present in order to act upon or simply monitor operations of a system. The present invention seeks to reduce such effects to some degree and seeks to provide a system that may be considered more user, operator, supplier, or manufacturer friendly and may be adaptable to real-world conditions and events.

#### DISCLOSURE OF INVENTION

The present invention presents an automated sample processing system that may greatly improve operation of automated sample processing from several perspectives. It can provide for a variety of communications interactions and modes. Scalability can be included so that additional resources, such as additional processing systems, additional terminals, and even additional communication access can be easily added to the system. To achieve the goal of assuring a good processing result stand alone capability with fault tolerance in the event of an unavailability or even a breakdown in communications can be included. In providing this disclosure, it should be understood that the various examples and designs disclosed for sample processing and other disclosed techniques, are not meant to limit the present invention to any particular embodiment, whether apparatus, method, or otherwise. These descriptions are provided rather to describe various sample processing techniques in a manner in which the present invention can be understood. The descriptions incorporated by reference and the various examples should not be construed to limit the present invention to only such techniques. This disclosure, however, may be understood to incorporate the various techniques in the context of the various embodiments of the present invention.

The techniques and systems of sample processing are addressed in a fashion that may provide the processing of one or more samples or of a plurality of groups of one or more samples in sequential or non-sequential fashion. Processing of samples may be determined by the protocol to be followed for each sample or a protocol for multiple samples. Aspects of the present invention may be especially applicable to sample processing having one or a plurality of processing steps to be performed on one, a portion, or an entirety of samples, such protocols identified in some instances by individual carriers presenting the samples or by the individual samples themselves. As mentioned, the present invention may be especially applicable to immunohistochemistry (IHC) techniques, as well as in-situ hybridization (ISH) and fluorescent in-situ hybridization (FISH), special staining of samples, and microarrays; especially techniques incorporating target retrieval, deparaffinization, pretreatment, or the staining of samples. Furthermore, embodiments may be directed to processing sequences addressing issues of processing control.

Embodiments of the invention may further relate to automated control and communication systems for sample processing. Embodiments may be directed to remote, isolated, and/or continuous data transfer, acquisition, input, maintenance, and retrieval for

sample processing, as well as information sharing of processing protocol and processing information, and scalable designs to permit users to easily configure a system as desired.

To disclose the foregoing and other objects and in accordance with the purposes  
5 of the present invention, as broadly embodied and described herein, the present invention is characterized in various claims and in explanatory disclosure. None of these should be understood as limiting. Further, all claims presented at any time are incorporated in the specification to afford all opportunities of presentation. Claims potentially to be pursued for some of the initially presented aspects of the invention may include any aspects  
10 described.

To achieve the foregoing and other objects of invention, and as may be further disclosed and claimed throughout this description, the invention may comprise an automated sample processing system comprising a plurality of drawers, a plurality of  
15 sample carrier elements that may even be each removably configured with one of the drawers, and an adaptive or other sample processing control system. The sample carriers may be both movable and removable. The sample processing control system may automate the sample processing system and may provide for a variety of communication transfers to/from/and within an overall system so that one or more samples may be  
20 processed according to one or more protocols, potentially indicated by information on slides or otherwise input to the system. This sample processing may comprise one or more sampling protocols and steps, such as deparaffinization, target retrieval, and staining.

A sensor may be provided in some embodiments that may automatically identify  
25 information from one or more samples, sample carriers, or slides. In embodiments, protocol information may be provided or made available by the sample processing control system. The sample processing system may then process one or more samples or perhaps slides, or one or more batches of slides, concurrently, sequentially, or in any other  
30 temporal fashion, potentially in accordance with protocol information previously provided for a sample by a user or other decision maker. This information can then be made available for use by the sample processing control system. Sample batches or individual slides may even be inserted or removed during processing protocol steps by the control and monitoring accomplished by the adaptive sample processing control system.

35

Another embodiment of the present invention that may achieve the foregoing and other objects of invention may comprise a method of sample processing, comprising the steps of: accessing at least one of a plurality of samples or sample drawers, providing at least one sample carrier or perhaps a sample carrier retainment assembly configured with  
5 at least one sample, configuring at least one of the drawers with the at least one sample carrier, and adaptively processing the sample. The step of processing or perhaps even adaptive processing may be applied to automate the processing of samples and may allow for either or both continuous or batch processing of samples or slides. It may also afford multiple independent sample or slide processing and in some embodiments slide  
10 processing to process each slide independently.

Embodiments of the invention may further comprise a method of automated sample processing, comprising the steps of: acquiring or accepting or accessing information such as protocol or reagent information, transmitting such information to at  
15 least one sample processing system or even a stand alone processing system over an isolated communication functionality, and processing samples. Furthermore, embodiments may provide for handling, maintaining, sharing, and using the sample processing information. These and other aspects may be provided for individual samples or multiple batch processing, and in a real-time manner. It may also be accomplished in  
20 and adaptive manner, perhaps for multiple batch processing or the like.

Again, as mentioned, many of the various aspects of the present invention are applicable to immunohistochemistry (IHC), as well as in-situ hybridization (ISH) and fluorescent in-situ hybridization (FISH), special staining of samples, microarray  
25 processes, and techniques incorporating target retrieval or the staining of samples. Furthermore, embodiments are directed to processing sequences addressing issues of processing control, and may be particularly applied to slide processing systems.

#### BRIEF DESCRIPTION OF THE DRAWINGS

30

The accompanying figures, are incorporated in and form a part of the description, illustrate some of the preferred embodiments of the present invention. Together with the written description and disclosures of the specification, they serve to explain principles of the invention and to enable each of the disclosed embodiments.

Figure 1 is a depiction of an embodiment of an overall system incorporating some of the features of the invention.

Figure 2 is a depiction of an embodiment of a portion of a sample carrier assembly of one embodiment of the invention.

5 Figure 3 is a depiction of an embodiment of a robotic movement aspect of one embodiment of the invention.

Figure 4 is a flow chart of some representative process steps of an embodiment of the invention.

Figure 5 is a block diagram of an embodiment of the invention.

10 Figure 6 is a depiction of an embodiment of a device incorporating some of the features of the invention.

Figure 7 is a depiction of an embodiment connecting one stainer with one manager & server and one label printer.

15 Figure 8 is a depiction of an embodiment connecting multiple stainers with multiple managers and multiple label printers.

Figure 9 is a depiction of an embodiment connecting a system to a lab network and lab information system.

Figure 10 is a block diagram showing some of the internal software features.

20 Figure 11 is a description of representative deparaffinization steps of an embodiment of the invention.

#### BEST MODES FOR CARRYING OUT THE INVENTION

25 The following descriptions are provided to describe various embodiments of the present invention in a manner to facilitate a more detailed understanding some of the inventive features. The variously described examples and preferred embodiments should not be construed to limit the present invention to only the explicitly described systems, techniques, and applications. This description may further be understood to incorporate the various systems, techniques, and applications, both singularly and in various combinations consistent with the various inventive features and embodiments of the present invention. Accordingly, the following is a detailed description of a number of specific embodiments of the invention.

35 Figure 1 shows one embodiment of a sample processing system 101 in accordance with the present invention. The sample processing system 101 is configured to achieve



an appropriate sequence of events that achieves a desired result to some degree. In achieving this sequence in an automated fashion to some degree the sample processing system is deemed an automated sample processing system and achieves automatic processing of at least one sample. This automated sequence as well as other aspects of the invention may be controlled by hardware, software, or some combination of them to accomplish a desired sequence with limited human intervention. Regardless how achieved, the automated control may be provided by a process operation control system 171 (shown conceptually in Figure 10) to direct the various activities. As shown in figure 10, this (as well as other functionalities discussed) may be software programming or subroutines; again, it may also include hardware or the like. Referring to Figure 2, the sample 198 processed may be any material, but is most likely a biologic material such as a biological sample or a biological specimen, perhaps such as a histological sample, e.g. tissue and cell specimens, cells, collections of cells, or tissue samples, the definition to include cell lines, proteins and synthetic peptides, tissues, cell preps, cell preparations, blood, bodily fluids, bone marrow, cytology specimens, blood smears, thin-layer preparations, and micro arrays. It should also be understood to include slide-based biological samples. As used, a sample may be arranged on a carrier element 197 such as a slide, or microscope slide, or the like that may maintain the sample's position or integrity. The carrier element 197 may be configured to move and thus reposition the sample 198. As such, it may be considered a movable carrier element. In processing a slide, the automated sample processing system may serve as an automated slide processing system.

The automated sequence may involve a significant number of steps. In fact each process can itself require many automated movements to achieve its goal. Each of these types of operations or actions may be relevant to understanding an instrument's operation. Further, each of these types of operations or even a lesser set of significant events may be considered important details of the sample process operation. As explained later, it may be valuable to capture and make available historical or other information relative to a significant number of these actions such as all of these operations, some subset of these operations, one-half of these operations, one-third of these operations, or the like. Further, even the nature or type of the events that may be of interest may be varied. In general, any event that may indicate the propriety of operation or processing may be a subject. Naturally in order to achieve automated processing it will be necessary to schedule the various sample process or process operations desired. This can be achieved

by an item of software or the like that acts as a multiple event scheduler 401 as shown in Figure 10.

Referring to Figure 1, a particular design of a system may include cabinet sections 5 102 that may form outer portions of the system and serve to address general structural considerations of the system (a top cabinet section is not shown in Figure 1). The sample processing system may also comprise a plurality of drawers 104 used for the handling and processing of samples and sample carriers such as slides, potentially microscope slides. Other sample carriers may be accommodated consistent with the present invention. Each 10 drawer may be configured to accommodate carrier retainment assemblies that hold one or, most likely, a number of the particular carriers, slides, or samples involved.

As shown in Figure 2, in holding slides the carrier retainment assembly serves as a slide retainment assembly 106. There may also be carrier racks, modules, or magazines 15 encompassed within each of the two broad terms. This is merely one embodiment of a sample carrier retainment assembly. The slide retainment assembly, and indeed the generic carrier retainment assembly may comprise a slide rack, module, or a number of magazines. The slide retainment assembly 106 may be configured to accommodate a plurality of slides in at least one configuration in corresponding sample carrier retention 20 devices 108. The sample carrier retainment assemblies, are utilized in the processing of samples as further described below. It should be further noted that the sample carrier retainment assembly can be removably configured with the drawers 104, and may be stackable or nested within other retainment assemblies. One embodiment of such a system is shown in Figure 6.

25

The general sample processing system, and even one or more drawers 110 in the sample processing system may accommodate processing materials such as reagent containers 199 for sample processing, also further described below. A processing material retainment assembly, such as a container rack 111, shown in Figure 6, may be 30 utilized to accommodate reagent containers 199 or other processing materials within each of drawers 110. These drawers may be lockable through programming to prevent access during certain stages of automatic operation. Bottle inserts may be preferably configured with the retainment assembly to ensure proper processing material positioning within the processing material retainment assembly and the drawer.

35

Multiple drawers 110 may be included to allow for one or a plurality of sample processing protocols to be performed by the system 201. Past efforts at sample processing, as previously described, may have been limited to processing sequences for an entire batch of carriers within the system. The present invention, however, in part by  
5 providing a plurality of drawers and carrier retainment assemblies, may allow for interruptible individual, batch, or multiple batch processing, including real-time or adaptive capabilities, as further described below.

Indicator elements 112 as shown in Figure 1 may be provided to indicate a status  
10 and accessibility of the drawers and the carriers or materials within each drawer for an operator of the system. In one embodiment, visual indicators, such as light emitting diodes in preferred embodiments, may be used to indicate if a drawer is available, and perhaps unlocked, during operation of the sample processing system, and may indicate conditions such as a locked or open condition of a corresponding drawer, carrier capacity  
15 status of the drawer or of a carrier retainment assembly within the drawer, and chemical inventory status of the sample processing system, such as reagent loading status or capacity. A warning indication may be given by these or other indicator elements, as well as other indicative signals. One or a plurality of sensors may be utilized to determine the status of the drawer as indicated by the indicator elements 112 and to further provide  
20 processing status as further described below.

In accordance with the desire for an automated processing system, embodiments of the present invention may include robotic sample process functions or a robotic motion system 172 as shown in Figure 6. This may be responsive to the process operation  
25 control system 171 and may involve a continuous, and perhaps even interactive, transfer of information to achieve the desired operation steps. The robotic motion system 172 may further comprise an arm 120 utilized in sample processing, potentially having robotic movement, and in some embodiments, Cartesian movement perhaps with orthogonal movement directions as shown in Figure 1. Through the inclusion of a robotic motions  
30 system or the like, the system may provide an automated process operation capability that causes automated process operation events through robotic sample process functions. These may be responsive (a term intended to encompass any interaction, whether connected or not and whether directly or indirectly having an effect) to a number of perhaps stand alone devices such as stand alone stainers. As shown in Figure 3, the arm  
35 120 may comprise, in some preferred embodiments, one or more elements, such as an

actuator probe 122, a syringe or probe 124, an optical sensor element 86 and a non-discrete or other volume fluid and/or air applicator. The actuator probe may be utilized in the configuration and manipulation of the carriers in sample processing, further described below. In some preferred embodiments, the actuator probe 122 configures and  
5 manipulates the configuration of slides in the sample carrier retention devices 108 by actuation of carrier adjustment element 130 (see for example Figure 2), and in some embodiments, by contact with the slides. As mentioned, in some embodiments, manipulation or movement of the slides or the samples may be accommodated. This movement may result in a horizontal or vertical configuration of the slides to facilitate  
10 sample processing as described below.

As mentioned above, there may be a large number of process steps accomplished. As may also be appreciated from the nature of the processes envisioned, there may be uses of many different substances or the like. This conduct may generate or involve  
15 information that may be significant from an operational perspective. As such the present invention may provide the capability to accept, generate, provide, and transfer that information regardless of its nature. Aspects can broadly involve information to, from, or within the system. Regardless where the actual programming resides, the overall system can be designed to include an automatic sample process information transfer functionality  
20 configured to transfer information from a sample process system such as a stainer or conversely an automatic sample process system information transfer functionality configured to transfer information to a sample process system such as when information or changes are input to the system through a separate computer, such as a workstation or even a server. The information may be any type of information related to an aspect of  
25 sample processing, including but not limited to: refill information, inventory information, status information, backup information, off-site support information, sample input information, schedule input information, update information, real time status information, notice information (such as to an operator, administrator, supplier, or even manufacturer), and diagnostic information. Each of these may have a corresponding functionality, such  
30 as a subroutine or computer program that achieves the desired aspect. It may also involve the inclusion of an operationally-influential exteriorly-consequential information monitor 402 as shown generally in Figure 10 to monitor and cause notification of a person of an aspect relative to the system. Thus the present invention may include an ability to transfer, generate, and even monitor information of a broad nature.

35

As previously mentioned, arm 120 may comprise syringe 124. The syringe 124 may be considered a probe in some embodiments, depending upon the requirements of protocols to be performed. Syringe 124 may be fluidically connected with and may interact with one or more of the following: rinse agents, such as water; potentially  
5 removable and fluidically connected containers for the aspiration of reagents, such as aspiration of reagents from containers and to the samples presented with the carriers; and blow off or other removal agents such as an air source. Syringe 124 may be utilized to pierce processing material containers such as reagent containers. In some embodiments, a reservoir may be provided with the arm 120 to allow for various volumes to be aspirated  
10 by syringe 124. The unique configuration of the reservoir allows for efficient cleaning and drying of the internal portions of the syringe while allowing for the accurate pipetting or otherwise aspiration of a wide range of volumes.

In preferred embodiments, the sample processing system 101 may include an  
15 automatic slide identification element. This may be controlled to achieve the act of automatically identifying a plurality of slides. This may also be more generic such as there may be some type of sensor element and it may even comprise an optical sensor 86, a reader or scanner, such as a CCD camera, utilized to determine status information of processing materials, such as reagents as well as to identify slides. The sensor element,  
20 for example, may read, detect, or otherwise determine information in the sample processing system 101, for example, from processing material containers, such as, for example, reading coded or perhaps encrypted information provided on the container to determine reagent type and reagent location within the system. The sensor element may also determine status information of sample carriers. For example, in some embodiments,  
25 slides configured with a slide retainment assembly may be provided with informational indicia, such as a code, that may indicate information about the sample presented on the slide or the processing protocol to be performed. The sensor element may read the code of the slide to determine the protocol to be performed for the particular slide and sample.

30 A cleaning station 140, shown in Figure 1, may be included to clean elements of arm 120, and in preferred embodiments, may function to clean or otherwise remove completely the previously deposited reagent from the probe, or remove elements containing the internal and/or external surface of the probe and/or syringe 124. In one embodiment, the cleaning station may be configured to clean elements of arm 120, such  
35 as syringe 124, while such elements are configured with arm 120. The syringe may be

cleaned, for example, with a water rinse through the syringe while the syringe is positioned at the cleaning station. In other embodiments of the present invention, the cleaning station 140 may be configured to allow a drop off and pick up of elements such as syringes for cleaning while allowing the processing throughput of the sample processing system to continue.

Embodiments of the present invention may comprise a mixing station 150, shown in Figure 1. The system may mix component fluids, such as dyes, buffers, or other processing materials, preferably on demand and as the processing steps and protocols dictate. Fluids required during the processing steps may sometimes need to be mixed with other fluids to create a final activated fluid mixture or cocktail. However, the activity levels of these mixtures can be time sensitive and may therefore only be effective for a short period of time. The on demand, or perhaps just-in-time mixing of fluids is advantageous in that it allows the fluids to be mixed immediately before being used. This may be coordinated with the scheduling functions discussed below to permit the simultaneous goals of on demand mixing with enhanced scheduling. The syringe or probe 124, in preferred embodiments, will aspirate fluids into and from the mixing station 150 to mix component fluids. A rinse may further be dispensed into the mixing station to sterilize the station.

20

In preferred embodiments, slides are movable and configurable in both vertical and horizontal positions as required for the pretreatment and staining process. This allows for the automation of the pretreatment and staining of slides in various manners, including pretreatment and staining as accepted in conventional manual laboratory methods. The slides are initially loaded into the carrier retention assemblies, such as slide racks, and drawers in the horizontal position. If pretreatment is required, such as deparaffinization, the system rotates the slide into the vertical position and lowers these samples into a processing tank, further described below, filled with the required fluids. In some embodiments, the slide rack is lowered to affect lowering of the slides (see Figure 2). To perform the staining process on the slides, as described below, the system rotates or moves the slide to the horizontal position and a syringe or probe applies fluid to the sample, providing a horizontal staining of the sample. Each slide can be rotated independently allowing for the independent processing of different samples with different requirements.

35

In some embodiments, the individual fluids used for pretreatment may be contained in the system cabinet. Deparaffinization fluids (except DI water) may be drawn into the processing tanks, then returned to their containers for reuse. On a periodic basis, the material in the "dirty" containers may be discarded. The "clean" containers may be moved up to the dirty position, and then fresh fluid added to clean position. DI water may be drawn from the large system DI water container, and discarded after each use. Target retrieval solution may be drawn from dedicated containers, and may be recycled or discarded after each use.

Returning to the aspect of monitoring or capturing information, an embodiment of the system may be designed to monitor replenishable supply information, such as the status of buffers, reagents, stains or the like. By monitoring for a potential need for replenishable supplies the system may remove at least one possibility for human error. Significantly, the system may also act to automatically notify any number of people relative to the information monitored. With respect to replenishable supply information, the system may notify a user, an operator, an administrator, or even a supplier of an actual, potential, or impending need to replenish supplies. As such the system may be considered as including an automatic notice element 404, or the like.

In a similar fashion, an embodiment of the system may monitor or capture information that is of interest to the continued or continuous operation of the device. By including a monitor of some sort, the system may facilitate not only enhanced reliability and continuous operation, but it may permit preventative activities. Naturally, it may use the automatic notice element 404 as a result of such activities to inform a wide range of persons of relevant issues, perhaps even providing advance notice to a person of upcoming predictable or estimated events. For items that may be very important there may even be multiple notices either concurrently or sequentially and as such the system may include a multiple advance expiration notice element. One type of information that may be monitored is historical information such as information of a statistical or past nature. This can be useful for operators who desire to know, prove, or have a record of what actions actually occurred in the system. The system can act to capture and store historical information. When multiple stand alone systems are included, such as in a networked configuration as discussed below, each stand alone system (meant to encompass any system that has the ability to perform all or perhaps some portion of its functions without any need for an outside element or interaction) may capture and store

its own historical information, that is information about its own events or relative to it. This information, or at least part of it, may then be transferred automatically to a server or other separate electronic location at convenient times or perhaps when there is a communication link available. To assure for the continued availability of such information, there may be included an array of multiple memory elements 701 which may actually be configured as a mirrored array. This may be responsive to the historical information generation element, such as data capture element 414 and may include a separate electronic location historical information transfer functionality 703 in response to an automatic separate location availability monitor 704. Cross data capabilities between separate stand alone systems may provide for a sharing of such resources and other information such as by the inclusion of a processing system interaction functionality 705. This may permit both interaction and communication of data between stainers or the like.

By having a data capture element 414, the system may generate data that may include or permit analysis or use of a variety of aspects, including but not limited to: number of occurrence data, part operation data, amount of usage data, and amount of material used data, statistical data or the like. Such data may, of course, have a like element, perhaps a subroutine, to do or generate the various function or data involved.

In some embodiments, an imaging device such as an optical sensor 86 or an image-capture 2-D optical sensor, perhaps a CCD camera, or the like, may be used to determine the position or identity of the sample on the slide, providing for greater accuracy during sample processing. The system may also generate or also monitor subject sample data. Relative to the imaging device, the system may monitor or perhaps capture image data, such a sample image data, substance image data, system image data, and even pre- and post-event image data. Each of these may be systematically stored, transferred or provided for some purpose.

The processing of samples may be accomplished according to some preferred embodiments as shown in Figure 4 and Figure 11 consistent with features of the present invention. Variants of these protocols and processing steps, or other processing steps, may be accomplished consistent with the present invention.



One processing sequence may broadly comprise the pre-processing of a sample, if needed, such as deparaffinization (as previously described), and further comprise target retrieval (as previously described), and sample staining.

5           In some embodiments, specifics of in-situ hybridization (ISH) may be addressed. Embodiments of ISH may require a small volume of reagent, such as 15 microliters, to be placed on the sample. Heat control may be maintained between about 95-100 C and kept constant for a period of time. Temperature may then be lowered in a controlled manner.

10           Furthermore, fluorescent staining or tagging in IHC or ISH (FISH) may be performed consistent with the features of the present invention.

As mentioned, the sample processing system may automate the processing of samples mounted on carriers or slides. This configuration of the system allows for the  
15 flexibility for both continuous, interruptible, individual, and batch processing of slides with the design lending itself to meet established laboratory workflow demands. The multiple independent and redundant slide processing subsystems found within the system may also maintain its ability to process each slide independently.

20           The automatic processing may be achieved by designing a system with automated process operation capability or sequencing through at least some steps without human intervention. This may be controlled by or act in response to a process operation control system 171. This may be provided through hardware, software, or some combination of the two. One conceptual embodiment depicts some of the various capabilities in Figure  
25 10. Of course, the user needs the ability to specify the nature and sequence of the various steps or acts desired or even the appropriate priority or other scheduling parameters to be used. This can be accomplished by an input parameter capability 173 through the inclusion of even a sample process parameter input 173. Input can be provided on a separate computer or the like and can then be transferred through some electronic  
30 connection 176. Referring to Figures 7, 8, and 9, it can be understood that this connection may be with an element, such as a separate full function computer perhaps configured as a client or manager, or server, or otherwise programmed for operation with a sample process system and that is physically separate from the sample processing element such the stainer. By selecting an appropriate type of connection such as a scalable connection,  
35 it may be easy to establish a plurality of client, stainer, or other functionalities. This

connection may be an address-based connection. Communication may involve the process of prompting address-based electronic communications programming to request specific activity, then transferring that request for specific activity to an appropriate element such as a stainer, conducting activity in accordance with that request, and  
5 transferring a response to the request. By using a networked communication design, all of this may involve an intermediate computer functionality or an intermediate computer response functionality (e.g., programming that acts to respond thereto), such as the manager and server functionality 500 shown in Figures 7 and 5. Appropriate programming to permit the stainer or other sample process system to respond to the  
10 intermediate computer functionality can be included. All such communication can occur repetitively and the system may use a continuous physically remote communication link such as by communicating to a separate computer or the like. Even if not always in use, information transfer capability may be constantly available, that is involving a open line that can accommodate information transfer at nearly any time (other than when sharing  
15 such resources). The communication link that may establish remote information transfer abilities may also be a transient link, such as a link activated through a dial-up phone line or the like. By permitting an embodiment to continuously transfer sample process information, that is, throughout various sequences of the overall processing events, both process integrity, processing data communication information functionality, and general  
20 processing information availability can be assured.

With respect to the input of information to the sample process system, input can be retained by the creation of stored parameter process data 174 so that the system can achieve the aggregate or perhaps plurality of process operations desired even if a  
25 connection were lost. In order to facilitate uninterrupted processing, the input parameter capability 173 may be configured as an independent process parameter input with respect to the process operation control system 171, such that acts caused by the process operation control system 171 are unaffected by any action with respect to the independent process parameter input. Further, the input parameter capability 173 may also be  
30 configured as an autonomous input functionality through the inclusion of an autonomous input element.

With the desired types of processing input, the system may act to automatically schedule the various events perhaps through a schedule element 605. These events may  
35 be considered as making up an aggregated event topology in that there is an aggregation

of desired events and in that the events themselves present some topology or contour for a processing sequence. This topology may include only the events or it may include certain goals such as a particular prioritization or outcome desired. When using an initial input, the system may achieve scheduling of the events in the manner desired. Of practical importance may be the ability of an embodiment of the invention to permit and facilitate operator changes to the initial aggregated event topology. Significantly, these changes may be achieved dynamically, such as while other parts of the system are continuing processing. In facilitating changes while otherwise operating with little or no interruption, the system may act to achieve adaptive scheduling. This may begin as adaptive scheduling of an initial aggregated event topology and may evolve into adaptive scheduling of an altered aggregated event topology. This may occur on individual or perhaps stand alone devices, such as a stand alone stainer, or it may occur on an inter machine basis, such as by using an inter machine schedule indicium or an inter machine schedule element. Regardless, it should be understood that the scheduling of an altered topology may occur after commencing an initial automatic processing routine.

The alteration of the aggregated event topology may include any variety of actions that effectively alter an initial setup. These may include but are not limited to: altering the aggregate, such as perhaps adding a sample, deleting a sample, changing a sample, or altering the topology such as accepting a user change input such as merely a change in priority. They may also include accepting a temporary user change such a change that a user wants to see the effect of but may not wish to implement. Thus the system may include a sample addition element, a sample deletion element, more generally a sample change element 601, or a temporary user change element, each of which may be considered as creating some type of altered aggregated event topology. To permit a user decision embodiments may include functionality or subroutines for activating a user change or undoing a user change. These may be considered a user change activation element or a user change undo element. Such selection may be presented in conjunction with a results display element 602 of some sort such as an effect synopsis display element, a temporal impact display element (e.g., the time impact on one or more samples to be processed as a result of the alteration), and even an estimated temporal impact display element, whereby the time effect is only estimated.

As mentioned, the items to be processed or the sequence for processing may be altered. In embodiments, this may occur at any time and can result in the interrupting of

processing to accept the change and then a resuming of the processing with the altered aggregate topology. This can involve changing at least one aspect of sample processing that can cause a rescheduling of the robotic sample process functions. In order to accomplish this, there may be included a sample process change functionality 708, a  
5 process interrupt functionality 603, a process resume functionality 707, and a robotic sample process reschedule functionality 709. To accommodate any schedule, the system may be able to provide a buffer or the like to permit time flexibility in the sequencing of actions. To apply additional buffer, the system may thus include an additional buffer functionality 710. Upon an alteration in the aggregated event topology, rescheduled  
10 sequence may be used to interrupt or may provide an interrupt 603 relative to the initial sequence and to thereafter continue revised automatic processing according to the altered aggregated event topology. As can be understood, this may be accomplished without completing the initial automatic processing. The rescheduling may be programmed to achieve a variety of results and then to compare and determine a "best" depending on  
15 how the operator or system defines that goal. Achieving a variety of results can be accomplished by simulating runs or perhaps a portion of a run and comparing the results of that simulation. The simulation may be of varied sequences set up according to certain parameters as explained below. By so doing, embodiments may include varied-parameter robotic control simulation functionalities, that is programming that simulates robotic  
20 operations based on differing parameters. These varied-parameter robotic control simulation functionalities may be responsive to the aggregated sample process input by acting on the data the input creates. Specifically, the system may run multiple simulations, perhaps at high speed, for the same aggregated event topology with each simulation using different criteria to determine the sequence of steps. The results of these  
25 simulations may be indicium that can be used and compared. Comparison may be achieved by an automated process simulator comparator which may look at any indicium resulting from the particular simulation being considered. From the indicium, a decision may be made and a particular set of parameters may be determined to cause an enhanced, if not optimum, sequence for a desired goal. These parameters may then be used in a  
30 preferred functionality robotic control generator which may then actually create the sequence that is used for the desired process operation. In this fashion, the system may have a process generator that is responsive to the automated process simulator comparator and from which an automated process functionality may be created.

35 As may be understood by the above, rescheduling due to an altered aggregate

event topology may be impacted by a number of factors. As but one example it may be understood in shortening time for overall processing, the location of a particular substance or a particular sample may be important; the further between samples or substances, the slower the processing. Because of this type of factor, it is possible that the system may actually consider, simulate or otherwise assess factors and may suggest actions that may yield desired results. For example, the system may communicate, perhaps across a continuous remote communication link information that may be display a suggested sample location, a suggested sample drawer location, a suggested stainer location, or the like. From this the user may be able to accept a proposed action and may even be able to accept or reject the suggestion and communicate that decision over a remote, continuous, or perhaps transient link. Naturally, such activities as well as any rescheduling or simulating may be the result of an operator request also communicated over the link or network.

Similar to the act of suggesting to the operator a particular action that may enhance scheduling, the system may act to communicate over the link or network to inform the operator of needed events or the like. If a particular substance is required but is not present in the machine (likely as sensed by the device itself perhaps through the optical sensor), the system may automatically prompt an operator for a particular action needed, such as insert the needed reagent or the like. In downtime or otherwise, the system may even repetitively automatically check if an operator action is needed. As such the system may include an automatic operator need prompt 608. It may also provide a variety of information such as real time status information, pending sample information, a real time completion estimate for an aspect (e.g., a sample, a drawer, a batch, or the like). Each of these may be accomplished by software and hardware perhaps by including a real time status information element, a pending sample information element, or a real time completion estimate element, each shown conceptually as the information element 609.

As to any of the above capabilities, such may not only act independent of the automated process operation capabilities, but where applicable, they may be fully functional even without the presence or operability of the automated process operation capability (which itself may or may not be in a process device). They may be achieved in a variety of manners, including by providing a separate full function computer 181 (e.g., separate from the capability provided or required by a process system) that may be

programmed to accomplish the desired function. In addition, in order to accomplish a goal of addressing practical and institutional needs, any capability may be configured to provide simplified use and may even be available in a highly simplified level of detail. This may be a "wizard" type of system where there is a "step-by-step" method for functions such as adding slides, achieving the desired input, or the like. Such an aspect may even be simple, regimented, and somewhat inflexible. A structured or simplified input can facilitate input by persons not required to have the full spectrum of skills necessary to be responsible for the operation of the sample processing system 101.

10 As part of the functions of monitoring or perhaps providing historical information, or even a play back of events, the system may include some type of data capture element 414. As may be appreciated from the initial discussion of the types of actions potentially needing to be programmed, the data capture element 414 may capture individual movement data, only robotic action data, individual robotic movement data, individual operation data, or even individual usage data. Thus the data capture element 414 may be an individual movement data capture element, a robotic action data capture element, an individual robotic movement data capture element, or an individual operation data capture element. All or any part of this data may be systematically stored such as storing all important details, only particularly important details (e.g., relative to highly sensitive valves, substances, or the like) or even only a significant number of details relative to sample process operations. Thus the data capture element 414 may be a systematic process detail capture element. Once captured, this data may be stored in a number of perhaps redundant fashions as discussed above.

25 In storing the data, the system may create a segmented computer file, that is a file that contains only such data so that it is not as manipulatable as other files. This may aid in assuring the accuracy or even certifiability of the events depicted. For instance for any particular sample, there may be automatically generated upon request a simulation -- perhaps with a time base appended -- of what happened to that particular sample as well as pictures of the sample before and after its processing. The data so stored may even be created as an inalterable computer record and perhaps may even include an integral change indicia that can prove its accuracy. When stored, the system may create a common format computer record so that user can easily work with it or it may create a proprietary format computer record that cannot be altered or the like. Thus the significant process detail memory 412 may represent a segmented computer file memory

element, an inalterable computer record memory element, an integral change indicia memory element, a common format computer record memory element, or a proprietary format computer record memory element.

5           The capture of historical information may include time of occurrence data, such as actual date data, actual time data (e.g., UTC, etc.), precise time data (e.g., hours, minutes, seconds), relative time data, absolute time data, initiation time data, completion time data (e.g., process, protocol, motor operation events, or the like), reagent lot, and reagent expiration data. Again, the data capture element 414 may include, but is not limited to, a  
10 time of occurrence data capture element, an actual date data capture element, an actual time data capture element, a precise time data capture element, a relative time data capture element, an absolute time data capture element, an initiation time data capture element, or a completion time data capture element.

15           One item that may be of particular user desire is the fact that the data capture element 414 may represent an individual sample process data capture element, an individual slide log data capture element, a type of protocol data capture element, and even an individual slide log data capture element. There may also be a real time individual slide log data display to show actual processing as it occurs.

20           As used above, the slide identification information may represent any information unique to a particular slide, such as a serial number, patient number, patient name, unique image, or the like. In keeping with privacy concerns, there may also be coded or perhaps encrypted identification information or internal identification information that others  
25 cannot use to identify the particular patient involved or the like. As discussed below and as shown in Figures 8 & 9, the overall system may include a number of staining instruments and thus the input permitted to be communicated over the link or network can include preferred stainer information (which may or may not be indicated or accepted by the automated system). Provision can also be included to communicate a desire to  
30 conduct a rush or stat test when there is an immediate or urgent need for process information. Such may also be linked with user privileges information so that only certain individuals may displace other tests to create a different priority. Of course all permutations and combinations of the above may be included.

For automated operation, the input may create data such as parameter process data 174 that may be perhaps redundantly stored at some location(s). To provide autonomous operation, it may be independently stored on the processing system involved perhaps in the multiple memory elements 701. It may also be stored at a separate electronic location 5 or on a physically independent memory remote from an actual stainer itself. This may be accomplished by utilizing the communication link or perhaps by using the network if provided. It may involve use of the primary or secondary storage perhaps of a separate full function computer programmed or configured to accept and/or store data. In such a fashion, the computer may contain what could be considered as an independent memory 10 174. Since the computer is likely physically separate, it may be considered to have a physically independent memory, a separate electronic location, or perhaps even a remote location memory such as when it is remote from the process equipment.

By using independent memory and independent other functionality, the system 15 may facilitate full operational functionality of the automated process operation capability. Since the automated process operation capability is fully operational during operation of either the memory or input, the storing or inputting or other function can be conducted without interrupting the process operation. Thus the inputs can be later accessed at a process time independent of the time of accomplishing slide process parameter input or 20 storing. In addition, entry or storing may also be accomplished at least in part concurrently with the processing of certain samples. This processing may even be initiated significantly after completion of the slide process parameter input action. Such may occur at least about one hour after the input, at least about three hours after the input, at least about eight hours after the input, at least about one day after the input, at least 25 about two days after the input, and at least about one week after the input.

All this information must, of course be used by some person. Any interested person may have the information available to them, such as an operator (e.g., anyone responsible for all or a portion of a process or the instrument), an instrument operator 30 (e.g., an individual physically responsible for all or a portion of a process), an administrator (e.g., a person managing operators or perhaps responsible for order placement), a substance or other supplier, or even a manufacturer, such as for support and maintenance capability. For events that may require external actions (e.g., ordering more reagent or the like), the system may automatically notify at least one of these types of 35 people and thus the automatic notice element 404 (such as a display which may be visual



or otherwise) may be considered as representing an automatic operator notice element, an automatic administrator notice element, an automatic supplier notice element, or an automatic manufacturer notice element. It may also be considered as representing an automatic operator exteriorly-consequential information notice element, an automatic administrator exteriorly-consequential information notice element, an automatic supplier exteriorly-consequential information notice element, or an automatic manufacturer exteriorly-consequential information notice element.

Notice may be given at a variety of times. The system may act to automatically advance notify a person such as of an upcoming expiration date or of a need to reorder in advance. In so doing it may have or have input to it some type of lead time information that tells it how early to take the action. By properly configuring a lead time information data element, lead time may vary by location and situation, for example a machine around the world or used continuously for critical processing may have a longer lead time than a machine right next to a supplier or used only sporadically. Order lead time information, reagent order lead time information, maintenance lead time information (any of which may vary over the course of a year or from time to time) may be utilized and as such the lead time information data element may represent an order lead time information data element, a reagent order lead time information data element, or a maintenance lead time information data element.

Communication, such as a notice or the like, may be displayed in a variety of ways. Internet and other links can be established so that an operator need not be physically attending to the sample process system while interacting with it. The system may be designed to respond to a remote information link 711 such as shown in Figure 10 where the link is provided through the separate full function computer 181. As mentioned above, this interaction may be repetitive, continuous, or transient, such as when including a transient remote response functionality. Through the communication link(s) available to it, the system may even automatically E-mail a person through inclusion of an E-mail notice element; it may automatically print out (including faxing) a notice by having an automatic printout notice element. Among other possibilities, it may automatically utilize a telephone line for simulated or reproduced voice or other information, may have an automatic telephone line utilization element, may have automatic internet communication capabilities, may have TCPIP capabilities, or the like.

In some embodiments, the system may be comprised of independent or perhaps redundant slide staining modules (some embodiments may comprise eight modules) as shown for some embodiments in Figures 1 and 6. Throughput may be based on the time to first result with the system allowing access to completed slides as soon as a staining module has completed the scheduled staining tasks. The multiple independent or redundant staining modules may allow for both continuous and batch processing of slides. Additionally, each independent staining module may also allow for the independent pre-treatment and staining of each slide. A carrier retainment assembly, such as a slide retainment assembly, may be used to introduce slides to be processed into the drawer 104, the drawer, slide retainment assembly, and components thereof forming a stain module. The slides may occupy one or more positions of the slide retainment assembly, such as at carrier retention devices, up to the capacity of the slide retainment assembly with the potential for each slide being processed independently of other slides configured with the slide rack. Embodiments of the stain modules, drawers, slide racks, and components thereof are also shown in Figure 6. Figure 6 also provides other embodiments of system features, such as an embodiment of the arm 120 and the component features of the arm.

Slide retainment assemblies having one or more slides and even reagent containers may be introduced into the staining or reagent modules by introduction into drawers 104 one at a time or in any combination until all or an appropriate number of staining modules are appropriately occupied. There may be no restrictions as to the order, number or timing of when the slide retainment assemblies are introduced into the system, the system may also allow for adaptive scheduling of sample loading. Staining modules, and in some embodiments the drawers of the staining modules, may lock out access to the slides during the processing period and may release them to the operator upon completion of the staining or other process on the last slide of that module. In some embodiments, the order in which the slide retainment assemblies are released may be dependant on the time required to process the last slide of the retainment assembly. Slides may even be processed in the most time efficient manner independently of the order to which they were introduced into the system. The system may provide an optimum or merely an enhanced temporal scheduling of the various sample process steps. To accomplish this, the system may automatically schedule steps that are interspersed for an enhanced time result. This interspersing may be an interleaving of a number of process operations and even an interleaving of a number of individual sample operations. In addition to interleaving steps, the system may sequence the individual sample operations. Regardless

as to how programmed, it may be configured through hardware or software or a combination of each to provide an enhanced temporal scheduler element 179, a process operations interleave element, an individual sample operations interleave element, or even an individual sample operations sequence element. These can be created by integrating  
5 the automated process operation capability and either the parameter data or perhaps some replicated portion of that parameter process data (as mentioned later) and can thus act to create an interspersial robotic control functionality.

The control of the processing samples may be accomplished according to the  
10 following preferred embodiments, one preferred embodiment shown in Figure 5, although other processing may be accomplished consistent with the present invention.

The processing sequence may be input, such that the various steps of a protocol for samples may be automated by one or more algorithmic controls. Input may be  
15 accomplished as follows: 1) selecting a first protocol step, 2) selecting a second protocol from a restricted list of menu items that are compatible with the first protocol step, and 3) selecting subsequent protocol steps from a restricted list of menu items that are compatible with the preceding protocol step.

20 As shown in Figures 8 & 9, in expanded systems, a sample processing system manager, such as a computer server may be connected with a number of individual sample processing systems. These may represent automated slide stainers or even stand alone automated slide processing systems such that they are fully capable of functioning with connection to other devices. In systems where a connection does exist, the  
25 capability of electronically connecting a number of automated slide stainers or automated sample processing systems or printers 200, may be provided. As mentioned earlier, there may be one or more separate full function computers connected. The connection may be established as a connection to a physically separate system such as the separate full function computer 181. Connection may be through a hub 193. There may be a  
30 multitasked central processing unit resource on either the stainer or the computer or there may be a number of central processing units that are configured to avoid using or implementing a multitasked central processing unit resource relative to the process operations in order to maintain full independence or perhaps even autonomous operation. The connection, whether for input or other operation may also be a remote link (including  
35 ability to be made remote such as in detachable memory) such as an Internet connection

element, a telephone line connection element, a wireless communication element, a hardwired connection, or even a detachable memory element. In a preferred embodiment, connection among perhaps a number of process systems and perhaps a number of computers, such as workstations and a server (the latter residing either separately or as  
5 part of a workstation), may be achieved by use of a local area network (LAN), such as a group of computers and associated devices that share a common communications line or perhaps wireless link and may even share the resources of a single processor, memory, or server within a small geographic area (for example, within an office building or complex). A local area network for this type of system may also include features such as  
10 but not limited to: an Ethernet element, a token ring element, an arcnet element, a fiber distributed data interface element, an industry specification protocol, a bluetooth-based element (named but not contemporary to King Harald Bluetooth of Denmark in the mid-tenth century!), a telecommunications industry specification using a frequency band of 2.45 GHz, a communication specification applying an IEEE 802 standard, a frequency  
15 hop communication specification, a shared common link element, a transmission control protocol/internet protocol communication element, a packetized information protocol, a shared protocol, a proprietary protocol, and even a layered protocol exchange system. By providing an electronic connection 176 between various resources, the local area network such as the stainer network 183 (a network dedicated to only the stainer or perhaps  
20 sample processing resources for integrity, security, and other purposes) in one embodiment may transmit a electronic memory address to achieve access to the appropriate information. Connection may also be established to an external network, an office network, a laboratory network, facilities intranet system, or even a lab information system 195 (LIS) such as through a bridge 194.

25

As mentioned, connection may be accomplished over Internet connections but more preferably is accomplished over local area network connections that are isolated from other communication traffic or instructions so that integrity of the processing events and system can be assured. Thus using a separate stainer network 184 may permit for an  
30 isolation functionality or an isolated electrical connection. Bridge 194 may be included in such a design. In addition, each sample processing system may be individually controlled, in some embodiments, by a PC attached with, internal to, or otherwise provided. Data sharing between sample processing systems and a system manager may be performed to allow identification, tracking, and status of sample batches, reagents, and  
35 other agents and components of the sample processing system. A determination of which

system has which reagents, reagent type, slides and protocols may be performed. Log files for each processing sequence, protocol, or slide can be generated for monitoring processing status. Database maintenance (including but not limited to purge, compact, back-up, archive, database/list functions) and system diagnostics (including but not limited to exercising active system components to verify proper operation and assisting in troubleshooting efforts) may be accomplished manually or automatically and may be communicated over the various link(s) available.

In a networked embodiment or otherwise, the system may be configured to automatically access the required data through operation of the process operation control system 171 by inclusion of an automatic memory access element. This access may be achieved by specifying an electronic memory address that may be transmitted by a electronic memory address element 178 perhaps over an isolated local area network and may be followed by automatically replicating that data on some a memory aspect appropriate for operation such as an automatic data replication memory.

In a network embodiment, a sample processing system manager, such as a computer server or manager 500 may be connected with individual sample processing systems. This may be accomplished over Internet connections but more preferably is accomplished over LAN connections. Each sample processing system may be individually controlled, in some embodiments, by a PC or a separate full function computer 181 attached with, internal to, or otherwise provided. Data sharing between sample processing systems and the system manager may be performed through the communication link(s) to allow identification, tracking, and status of sample batches, reagents, and other agents and components of the sample processing system. A determination of which system has which reagents, reagent type, slides and protocols may be performed. Log files for each processing sequence, protocol, or slide can be generated for monitoring processing status. Database maintenance (including but not limited to purge, compact, back-up, archive, database/list functions) and system diagnostics (including but not limited to exercising active system components to verify proper operation and assisting in troubleshooting efforts) may be accomplished manually or automatically over the communication link(s) if and when available.

A control interface may be provided for the operator, such as a graphical user interface (GUI), and may accommodate various languages. Help menus may be provided

to assist in sample processing. Password protection features can be provided and even administrator control over at least some aspects. This may include the capability to include administrator limitations on the functional availability of any aspect of the system or of specific stainer availability or functionality, certain reagent availability  
5 functionality, certain protocol availability functionality, patient identification information access functionality, process priority request functionality, and immediate, urgent, or stat process request functionality.

After all data is input, the system may act to determine operational readiness by  
10 inclusion of an operational readiness determination element 177 that may be programmed to assess if appropriate resources, drawers, slides, reagents, or other aspects are present or available to the system. As mentioned above it may communicate this information over the links or perhaps the network to an operator or other person.

15 Upon initial programming or when alteration of the aggregate event topology occurs, scheduling of events can occur. This may include consideration of timing tolerances, referred to in some embodiments as "bubble tolerance", that may be controlled as between steps, such as between aspiration cycles. Additional control may be accomplished through timing algorithms to determine time tolerances of components of  
20 the processing system, such as the monitoring of "shelf life" or viability of reagents. Furthermore, adaptive scheduling of sample and slide insertion and removal into the system, as previously described, may be accommodated on an on-going basis throughout operation of the sample processing system.

25 One aspect of the invention focuses on an automated staining apparatus and a method of automated treating of samples. As to this aspect, the present invention relates to an automated staining apparatus for treating samples arranged on carrier elements or means, such as but not limited to microscope slides, located at defined positions close to or in the apparatus by removing a portion of selected reagent from a station containing a  
30 plurality of reagents and thereafter applying the reagent to a sample, e.g. a tissue, organic cells, bacteria etc., arranged on the carrier means. This aspect of the invention facilitates that two or more reagents are mixed and the mixture applied to a sample. It also relates to a method of automated treating of samples by mixing reagents and applying the mixture to the samples.

35

Staining apparatuses for staining and treating samples by means of a probe normally comprises a first station for containing one or more reagent containers; a second station for mounting slides, a probe arranged for removing a portion of reagent from a selected reagent container and applying the reagent to a slide on which the sample is  
5 arranged and a drive means for moving the probe between the various stations.

An object of this aspect of the present invention is to improve the known apparatuses for staining samples as well as the method for automatic staining of samples by facilitating a wider range of available processes or procedures used to implement  
10 treatment, so as to ease the implementation of different staining and/or treatment processes that may be performed automatically, alternatively or additionally to provide an increased quality of some specific staining processes.

The term staining is used for the end product of the process, by which certain parts  
15 of the sample may be stained, i.e. has obtained a different colour, either in the optic range or in another electromagnetic range, such as ultra violet, or the staining may be an detectable, preferably automatically detectable, change in properties, such as fluorescent properties, magnetic properties, electrical properties or radioactive properties. To obtain the staining, the sample normally has to undergo a series of treatment steps, such as  
20 washing, binding of reagents to the specific parts of the sample, activation of the reagents, etc. and each treatment step may include a plurality of individual treatments.

In some staining processes, it may be required for one or more treatments to use a mixture of reagents prepared from two or more separate reagents which may be  
25 somewhat incompatible e.g. unmixable, such as a water based and an oil based reagent, or insoluble, and therefore requires that the two or more reagents are manually prepared and introduced into a reagent vial shortly before starting the staining process in order to obtain the best possible staining result for the selected examination purposes. For other processes, different staining process steps require a mixture of the same two reagents but  
30 in different dissolved ratios. Some process steps require mixtures of two or more reagents that, when mixed, have a limited time window of usability because internal chemical processes deteriorate the mixture. By providing a staining apparatus having an automated mixer integrated therein, these types of staining processes can be performed automatically instead of requiring human interaction or manual performance of some  
35 process steps in a much more automated process, and the quality of the staining process

may be improved as a desired degree of mixing of reagents may be provided or an optimal application time window for a deteriorating mixture may be reached.

5 The carrier elements or perhaps means are preferably arranged in groups or series on trays or the like, so that a plurality of carrier means may be removed from or situated in the apparatus simultaneously, and the apparatus preferably also comprises means for performing the intermediate storage of the carrier means with samples thereon and the removal of the carrier means from the apparatus automatically.

10 The operation of the staining apparatus may generally be controlled by means of a control element or perhaps a control means, typically a computer having a central processing unit and one or more memory units associated therewith, an control element or perhaps a means for controlling the various operations of the apparatus by controlling  
15 control means may have one or more data communication ports for enabling data communication with external computers by wire or wireless. The control means does not have to be physically arranged within the apparatus itself but may be a computer external to the staining apparatus and connected to the apparatus via a data transmission port thereof.

20 The operation of the staining apparatus will generally be controlled by means of control means, typically a computer having a central processing unit and one or more memory unit associated therewith, means for controlling the various operations of the apparatus by controlling stepper motors, solenoids, valves and/or other drive or control  
25 parts of the apparatus. The control means may have one or more data communication ports for enabling data communication with external computers by internal, wire, or wireless elements. The control element or perhaps means does not have to be physically arranged within the apparatus itself but may be a computer external to the staining apparatus and connected to the apparatus via a data transmission port thereof.

30 The present invention also relates to a method of fully automated treating of samples arranged on carrier elements by means of a staining apparatus controlled by means of a control element or means, wherein the method comprises the steps of situating a plurality of carrier means intermediately in a carrier means station, each carrier means  
35 having a sample arranged thereon, applying a portion of a first reagent selected from a



plurality of reagents to a mixing cup, applying a portion of a second reagent selected from a plurality of reagents to the mixing cup, mixing the reagents in the mixing cup by means of mixing means, moving a probe to the mixing cup by means of a probe drive means, removing a portion of the mixed reagents from the mixing cup by means of the probe, 5 moving the probe to a selected one of said carrier means, and applying the mixed reagents to the selected carrier means, so as to perform a treatment of the sample arranged on the selected carrier means.

The present invention further relates to the use of an apparatus of the present 10 invention as described above for exercising the method of the present invention.

The embodiment shown in the figures and described in details below is only an example of an apparatus in accordance with the present invention and is not limiting the wider scope of the invention as described in the enclosed claims.

15

As shown in figure 6, a detailed description of one embodiment of this aspect of the invention involves staining apparatus 201. The staining apparatus 201 may comprise a rectangular frame 204 surrounding a first station 202 comprising an array of compartments wherein each compartment a reagent container 203 is placed, and a second 20 station 205 wherein a number of separate racks 206 is placed, and where each rack may comprise a number of slides 207 mounted side by side in the rack 206. A robot arm to move a probe 210 in X and Y direction may be arranged above the frame 204 of the staining apparatus. The robot arm may therefore position the probe 210 above all reagent containers 203 as well as above all the slides 207, and may further operate the probe 210 25 in the Z direction to remove portions of a reagent contained in any of the containers 203, to transfer the portion of reagent and apply it to any of the slides 207 in order to provide a selected staining or treatment of the sample on each slide 207. By use of a suitable control element, e.g. a computer having the appropriate software, subroutines, or input data for the purpose, this staining apparatus 201 may be able to automatically stain or 30 treat samples requiring different staining or treatment reagents and processes.

Having the appropriate input data, the control element or perhaps means of the apparatus may operate the robot arm to commence a staining or treatment run by moving the probe to a first reagent container 203, into which the probe tip is inserted and liquid is 35 aspirated up into the probe 210 in an amount corresponding to the number of samples to

be stained or treated, in accordance with the input data provided to the control element. Additionally, under certain conditions, the instrument may be required to perform a reagent inventory before a staining or treatment run can commence. This inventory may be accomplished by use of the probe tip to actually touch the liquid surface in each  
5 reagent vial 203. To prevent cross-contamination between the reagents in the various containers 203, a cleaning of the probe 210 or at least the probe tip may be required after each measurement of a reagent level.

The probe 210 may be moved by the robot arm towards the slide retainment  
10 assembly 205 in which the slides 207 are mounted. The slides 207 may be situated with the surface horizontally oriented and the probe 124 may dispense the required amount of reagent on the appropriate slides in accordance with the input data. Alternatively, the probe 124 may be moved by the robot arm towards the reagent mixer 209 where it may release reagent into the cup of the reagent mixer 209, and may be subsequently moved to  
15 the probe washing station 208. The robot arm may move the new clean probe to a second selected reagent container 203 for collecting a selected amount of reagent from the second vial 203, and the probe may thereafter by means of the robot arm be moved to the reagent mixer 209, where the reagent in the probe 210 may be released into the cup of the mixer containing the first selected reagent. This may be commenced several times if more  
20 than two reagents are to be mixed for a specific staining or treatment process.

An object of the present invention is to provide a staining apparatus and a method for automatic staining of samples, in which the total process time for completing or even entering the staining protocol may be reduced. In particular, it is an object of this aspect  
25 of the invention to reduce the amount of time needed in general.

As can be easily understood from the foregoing, the basic concepts of the present invention may be embodied in a variety of ways. It involves both sample processing techniques as well as various systems, assemblies, and devices to accomplish sample  
30 processing, input, and other functions. In this application, the sample processing techniques are also disclosed as part of the results shown to be achieved by the various systems, assemblies, and devices described and as steps which are inherent to utilization. They should be understood to be the natural result of utilizing the devices as intended and described. In addition, while some devices are disclosed, it should be understood that  
35 these not only accomplish certain methods but also can be varied in a number of ways.

Importantly, as to all of the foregoing, all of these facets should be understood to be encompassed by this disclosure.

The discussion included in this application is intended to serve as a basic  
5 description. The reader should be aware that the specific discussion may not explicitly  
describe all embodiments possible; many alternatives are implicit. It also may not fully  
explain the generic nature of the invention and may not explicitly show how each feature  
or element can actually be representative of a broader function or of a great variety of  
alternative or equivalent elements. Again, these are implicitly included in this disclosure.  
10 Where the invention is described in device-oriented terminology, each element of the  
device implicitly performs a function. Importantly, neither the description nor the  
terminology is intended to limit the scope of the claims which may be included at any  
time.

15 It should also be understood that a variety of changes may be made without  
departing from the essence of the invention. Such changes are also implicitly included in  
the description. They still fall within the scope of this invention. A broad disclosure  
encompassing both the explicit embodiment(s) shown, the great variety of implicit  
alternative embodiments, and the broad methods or processes and the like are  
20 encompassed by this disclosure and may be relied upon at any time.

Further, each of the various elements of the invention and claims may also be  
achieved in a variety of manners. This disclosure should be understood to encompass  
each such variation, be it a variation of an embodiment of any apparatus embodiment, a  
25 method or process embodiment, or even merely a variation of any element of these.  
Particularly, it should be understood that as the disclosure relates to elements of the  
invention, the words for each element may be expressed by equivalent apparatus terms or  
method terms -- even if only the function or result is the same. Such equivalent, broader,  
or even more generic terms should be considered to be encompassed in the description of  
30 each element or action. Such terms can be substituted where desired to make explicit the  
implicitly broad coverage to which this invention is entitled. As but one example, it  
should be understood that all actions may be expressed as a means for taking that action  
or as an element which causes that action. Similarly, each physical element disclosed  
should be understood to encompass a disclosure of the action which that physical element  
35 facilitates. Regarding this last aspect, as but one example, the disclosure of a "retention

element" should be understood to encompass disclosure of the act of "retaining" -- whether explicitly discussed or not -- and, conversely, were there effectively disclosure of the act of "retaining", such a disclosure should be understood to encompass disclosure of a "retention element" and even a "means for retaining". It should also be understood that

5 in jurisdictions where specific language may be construed as limiting, as but one example in the United States where some interpretations of "means for" elements can be construed narrowly, broader equivalent language may be used and should be understood as encompassed by this specification. Such changes and alternative terms are to be understood to be explicitly included in the description.

10

Any patents, patent applications, publications, or other references mentioned in this application for patent are hereby incorporated by reference. In addition, as to each term used it should be understood that unless its utilization in this application is inconsistent with such interpretation, common dictionary definitions should be

15 understood as incorporated for each term and all definitions, alternative terms, and synonyms such as contained in the Random House Webster's Unabridged Dictionary, second edition are hereby incorporated by reference as well as the definitions presented by searchStorage.com, and the American National Standards Institute, Inc. American National Standard for Telecommunications, Telecom Glossary 2000 as also available at

20 www.atis.org, such to be considered as representing the meaning of the terms as understood by computer professionals. Finally, the priority cases for this application is hereby appended and hereby incorporated by reference, with specific reference made to and specific incorporation by reference of the disclosures in five of assignee's other sample processor disclosures, namely:

- 25 - PCT/US03/\_\_\_\_\_ filed December 19, 2003, listing DakoCytomation Denmark A/S as assignee and entitled "Information Notification Sample Processing System and Methods of Biological Slide Processing";
- PCT/US03/\_\_\_\_\_ filed December 19, 2003, listing Dakocytomation Denmark A/S as assignee and entitled "Enhanced Scheduling Sample Processing System and Methods
- 30 of Biological Slide Processing";
- PCT/US03/\_\_\_\_\_ filed December 19, 2003, listing Dakocytomation Denmark A/S as assignee and entitled "Advance Programmed Sample Processing System and Methods of Biological Slide Processing";

- PCT/US03/\_\_\_\_\_ filed December 19, 2003, listing Dakocytomation Denmark A/S as assignee and entitled "A Method and Apparatus for Automatic Staining of Tissue Samples"; and
- PCT/US03/\_\_\_\_\_ filed Monday December 22, 2003, listing Dakocytomation Denmark A/S as assignee and entitled "Systems and Methods of Sample Processing and Temperature Control".

Thus, the applicant(s) should be understood to have support to claim at least: i) each of the sample processing systems and subsystems as herein disclosed and described, ii) the related methods disclosed and described, iii) similar, equivalent, and even implicit variations of each of these systems, assemblies, devices and methods, iv) those alternative designs which accomplish each of the functions shown as are disclosed and described, v) those alternative designs and methods which accomplish each of the functions shown as are implicit to accomplish that which is disclosed and described, vi) each feature, component, and step shown as separate and independent inventions, vii) the applications enhanced by the various systems or components disclosed, viii) the resulting products produced by such systems or components, and ix) methods and systems, assemblies, devices, and apparatuses substantially as described hereinbefore and with reference to any of the accompanying examples, x) the various combinations and permutations of each of the elements disclosed, xi) each potentially dependent claim or concept as a dependency on each and every one of the independent claims or concepts presented, xii) processes performed with the aid of or on a computer as described throughout the above discussion, xiii) a programmable system as described throughout the above discussion, xiv) a computer readable memory encoded with data to direct a computer comprising means or elements which function as described throughout the above discussion, xv) a computer configured as herein disclosed and described, xvi) individual or combined subroutines and programs as herein disclosed and described, xvii) the related methods disclosed and described, xviii) similar, equivalent, and even implicit variations of each of these systems and methods, xix) those alternative designs which accomplish each of the functions shown as are disclosed and described, xx) those alternative designs and methods which accomplish each of the functions shown as are implicit to accomplish that which is disclosed and described, xxi) each feature, component, and step shown as separate and independent inventions, and xxii) the various combinations and permutations of each of the above.

Further, if or when used, the use of the transitional phrase "comprising" or the like is used to maintain the "open-end" claims herein, according to traditional claim interpretation. Thus, unless the context requires otherwise, it should be understood that the term "comprise" or variations such as "comprises" or "comprising" or the like, are intended to imply the inclusion of a stated element or step or group of elements or steps but not the exclusion of any other element or step or group of elements or steps. Such terms should be interpreted in their most expansive form so as to afford the applicant the broadest coverage legally permissible.

Any claims set forth at any time are hereby incorporated by reference as part of this description of the invention, and the applicant expressly reserves the right to use all of or a portion of such incorporated content of such claims as additional description to support any of or all of the claims or any element or component thereof, and the applicant further expressly reserves the right to move any portion of or all of the incorporated content of such claims or any element or component thereof from the description into the claims or vice-versa as necessary to define the matter for which protection is sought by this application or by any subsequent continuation, division, or continuation-in-part application thereof, or to obtain any benefit of, reduction in fees pursuant to, or to comply with the patent laws, rules, or regulations of any country or treaty, and such content incorporated by reference shall survive during the entire pendency of this application including any subsequent continuation, division, or continuation-in-part application thereof or any reissue or extension thereon.

## CLAIMS

What is claimed is:

- 5 1. A method of automated sample processing comprising the steps of:  
establishing a first stand alone automated sample processing system having an  
automated process operation capability that causes automated process operation  
events through first robotic sample process functions;  
establishing at least a second stand alone automated sample processing system  
10 having an automated process operation capability that causes automated process  
operation events through second robotic sample process functions;  
establishing an isolated electrical connection among said first stand alone  
automated sample processing system and said second stand alone automated  
sample processing system; and  
15 automatically processing at least one sample through operation of said first robotic  
sample process functions; and  
automatically processing at least one sample through operation of said second  
robotic sample process functions.
- 20 2. A method of automated sample processing as described in claim 2 wherein said  
step of establishing an isolated electrical connection among said first stand alone  
automated sample processing system and said second stand alone automated  
sample processing system comprises the step of utilizing an intermediate  
computer functionality.
- 25 3. A method of automated sample processing as described in claim 2 wherein said  
step of automatically processing at least one sample through operation of said first  
robotic sample process functions comprises the step of responding to said  
intermediate computer functionality, and wherein said step of automatically  
30 processing at least one sample through operation of said second robotic sample  
process functions comprises the step of responding to said intermediate computer  
functionality.
- 35 4. A method of automated sample processing as described in claim 3 wherein said  
step of automatically processing at least one sample through operation of said first

robotic sample process functions comprises the step of repetitively responding to said intermediate computer functionality, and wherein said step of automatically processing at least one sample through operation of said second robotic sample process functions comprises the step of repetitively responding to said intermediate computer functionality.

5  
10  
5. A method of automated sample processing as described in claim 2 wherein said step of utilizing an intermediate computer functionality comprises the step of utilizing a separate full function computer programmed for operation with an automated slide processing system.

15  
6. A method of automated sample processing as described in claim 5 wherein said step of utilizing an intermediate computer functionality comprises the step of utilizing a server functionality.

20  
7. A method of automated sample processing as described in claim 1 or 5 and further comprising the step of interacting between said first stand alone automated sample processing system and said second stand alone automated sample processing system.

25  
8. A method of automated sample processing as described in claim 7 wherein said step of interacting between said first stand alone automated sample processing system and said second stand alone automated sample processing system comprises the step of communicating processing data between said first stand alone automated sample processing system and said second stand alone automated sample processing system.

30  
9. A method of automated sample processing as described in claim 1 wherein said step of establishing a first stand alone automated sample processing system having an automated process operation capability that causes automated process operation events through first robotic sample process functions comprises the step of establishing a first automated slide processing system, and wherein said step of establishing at least a second stand alone automated sample processing system having an automated process operation capability that causes automated process



operation events through second robotic sample process functions comprises the step of establishing a second automated slide processing system.

10. A method of automated sample processing as described in claim 9 wherein said  
5 step of automatically processing at least one sample through operation of said first robotic sample process functions comprises the steps of:  
arranging a plurality of slides on a carrier retainment assembly;  
applying a reagent to said plurality of slides; and  
automatically staining said plurality of slides,  
10 and wherein said step of automatically processing at least one sample through operation of said second robotic sample process functions comprises the steps of:  
arranging a plurality of slides on a carrier retainment assembly;  
15 applying a reagent to said plurality of slides; and  
automatically staining said plurality of slides.
11. A method of automated sample processing as described in claim 10 wherein said  
20 step of establishing an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system comprises the step of utilizing an intermediate computer functionality.
12. A method of automated sample processing as described in claim 11 wherein said  
25 step of utilizing an intermediate computer functionality comprises the step of utilizing a separate full function computer programmed for operation with an automated slide processing system.
13. A method of automated sample processing as described in claim 12 wherein said  
30 step of utilizing an intermediate computer functionality comprises the step of utilizing a server functionality.
14. A method of automated sample processing as described in claim 13 and further  
35 comprising the step of establishing a plurality of client functionalities connected to said isolated electrical connection.

15. A method of automated sample processing as described in claim 1, 5, or 10 wherein said step of establishing an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system comprises the step of establishing a scalable connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system.
16. A method of automated sample processing as described in claim 15 wherein said step of establishing a scalable connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system comprises the step of establishing an address-based connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system.
17. A method of automated sample processing as described in claim 1, 5, or 10 wherein said step of establishing an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system comprises the steps of:
- prompting address-based electronic communications programming on a separate full function computer electrically connected to said first stand alone automated sample processing system and said second stand alone automated sample processing system to request specific activity on said first stand alone automated sample processing system;
- transferring said request for specific activity to said first stand alone automated sample processing system across said isolated electrical connection;
- conducting activity on said first stand alone automated sample processing system as a result of said step of prompting electronic communications programming on a separate full function computer;
- prompting address-based electronic communications programming on said first stand alone automated sample processing system to respond to said request for specific activity from said separate full function computer; and
- transferring said response to said request for specific activity to said first stand alone automated sample processing system across said isolated electrical connection.

18. A method of automated sample processing as described in claim 17 wherein said step of establishing an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system further comprises the step of establishing a local area network.
19. A method of automated sample processing as described in claim 18 wherein said step of establishing a local area network electronically comprises the step of incorporating a system having a feature selected from a group consisting of: an Ethernet element, a token ring element, an arcnet element, a fiber distributed data interface element, an industry specification protocol, a bluetooth-based element, a shared common link element, a transmission control protocol/internet protocol communication element, a packetized information protocol, a shared protocol, a proprietary protocol, and a layered protocol exchange system.
20. A method of automated sample processing as described in claim 1, 5, or 10 and further comprising the step of storing historical information.
21. A method of automated sample processing as described in claim 20 wherein said step of storing historical information comprises the steps of: storing historical information relative to said first stand alone automated sample processing system on said first stand alone automated sample processing system; and storing historical information relative to said second stand alone automated sample processing system on said second stand alone automated sample processing system.
22. A method of automated sample processing as described in claim 21 and further comprising the step of transferring at least part of said historical information to a separate electronic location.
23. A method of automated sample processing as described in claim 22 wherein said step of transferring at least part of said historical information to a separate electronic location comprises the step of automatically transferring at least part of

said historical information to a separate electronic location when said separate electronic location is available.

24. A method of automated sample processing as described in claim 1, 5, 10, or 20 wherein said step of establishing a first stand alone automated sample processing system having an automated process operation capability that causes automated process operation events through first robotic sample process functions comprises the step of establishing an array of multiple memory elements for said first stand alone automated sample processing system, and wherein said step of establishing at least a second stand alone automated sample processing system having an automated process operation capability that causes automated process operation events through second robotic sample process functions comprises the step of establishing an array of multiple memory elements for said second stand alone automated sample processing system.
25. A method of automated sample processing as described in claim 24 wherein said step of establishing an array of multiple memory elements for said first stand alone automated sample processing system comprises the step of establishing a mirrored array of multiple memory elements for said first stand alone automated sample processing system, and wherein said step of establishing an array of multiple memory elements for said second stand alone automated sample processing system comprises the step of establishing a mirrored array of multiple memory elements for said second stand alone automated sample processing system.
26. A method of automated sample processing as described in claim 1, 5, or 10 wherein said step of automatically processing at least one sample through operation of said first robotic sample process functions comprises the steps of: interrupting processing through operation of said first robotic sample process functions; and resuming processing through operation of said first robotic sample process functions, and wherein said step of automatically processing at least one sample through operation of said second robotic sample process functions comprises the steps of:

interrupting processing through operation of said second robotic sample process functions; and  
resuming processing through operation of said second robotic sample process functions.

5

27. A method of automated sample processing as described in claim 26 and further comprising the steps of:

changing at least one aspect of sample processing; and

rescheduling robotic sample process functions in response to said step of changing at least one aspect of sample processing.

10

28. A method of automated sample processing as described in claim 26 and further comprising the step of applying additional buffer to at least one sample in response to said step of changing at least one aspect of sample processing.

15

29. A method of automated sample processing as described in claim 1, 5, 10, 20, or 26 wherein said step of establishing an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system comprises the step of establishing a physically separate system connection.

20

30. A method of automated sample processing as described in claim 29 wherein said step of establishing an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system comprises the step of establishing an Internet connection.

25

31. A method of automated sample processing as described in claim 29 wherein said step of establishing an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system comprises the step of establishing an Ethernet connection.

30

32. A method of automated sample processing as described in claim 29 wherein said step of establishing an isolated electrical connection among said first stand alone

35

automated sample processing system and said second stand alone automated sample processing system comprises the step of establishing a telephone connection.

- 5 33. A method of automated sample processing as described in claim 29 wherein said step of establishing an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system comprises the step of establishing a connection to a separate room.
- 10 34. A method of automated sample processing as described in claim 29 wherein said step of establishing an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system comprises the step of establishing a wireless
- 15 connection.
35. A method of automated sample processing as described in claim 29 wherein said step of establishing an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated
- 20 sample processing system comprises the step of establishing a bluetooth-based connection.
36. A method of automated sample processing as described in claim 29 wherein said step of establishing an isolated electrical connection among said first stand alone
- 25 automated sample processing system and said second stand alone automated sample processing system comprises the step of establishing an e-mail based connection.
37. A method of automated sample processing as described in claim 29 wherein said
- 30 step of establishing an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system comprises the step of establishing a hardwired connection.

38. A method of automated sample processing as described in claim 1, 5, or 10 and further comprising the step of connecting said isolated electrical connection to an external network.
- 5 39. A method of automated sample processing as described in claim 38 and further comprising the step of establishing an isolation functionality between said isolated electrical connection and said external network.
- 10 40. A method of automated sample processing as described in claim 38 wherein said step of connecting said isolated electrical connection to an external network comprises the step of connecting said isolated electrical connection to an office network.
- 15 41. A method of automated sample processing as described in claim 38 or 40 wherein said step of connecting said isolated electrical connection to an external network comprises the step of connecting said isolated electrical connection to a laboratory information system.
- 20 42. An automated sample processing system comprising:
- a. a first sample;
  - b. a first stand alone automated slide processing system having a first robotic motion system to which said first sample is responsive;
  - c. a second sample;
  - 25 d. a second stand alone automated slide processing system having a second robotic motion system to which said second sample is responsive;
  - e. an isolated electrical connection among said first stand alone automated sample processing system and said second stand alone automated sample processing system;
  - 30 f. a first automated process functionality to which said first robotic motion system is responsive; and
  - g. a second automated process functionality to which said second robotic motion system is responsive.

43. A automated sample processing system as described in claim 42 wherein said isolated electrical connection comprises an intermediate computer functionality.
- 5 44. A automated sample processing system as described in claim 43 wherein said first automated process functionality comprises an intermediate computer response functionality, and wherein said second automated process functionality comprises an intermediate computer response functionality.
- 10 45. A automated sample processing system as described in claim 44 wherein said first automated process functionality comprises a repetitive intermediate computer response functionality, and wherein said second automated process functionality comprises a repetitive intermediate computer response functionality.
- 15 46. A automated sample processing system as described in claim 43 wherein said intermediate computer response functionality comprises a separate full function computer programmed for operation with an automated slide processing system.
- 20 47. A automated sample processing system as described in claim 46 wherein said intermediate computer response functionality comprises a server functionality.
- 25 48. A automated sample processing system as described in claim 42 or 46 and further comprising a processing system interaction functionality to which said first stand alone automated sample processing system and said second stand alone automated sample processing system are responsive.
- 30 49. A automated sample processing system as described in claim 48 wherein said processing system interaction functionality comprises a processing data communication functionality between said first stand alone automated sample processing system and said second stand alone automated sample processing system.
50. A automated sample processing system as described in claim 42 wherein said first stand alone automated sample processing system comprises a first automated



slide processing system, and wherein said second stand alone automated sample processing system comprises a second automated slide processing system.

51. A automated sample processing system as described in claim 50 wherein said first  
5 automated slide processing system comprises:  
a plurality of slides on a carrier element retainment assembly;  
at least one reagent container; and  
a slide stain element configured to act upon said plurality of slides,  
and wherein said second automated slide processing system comprises:  
10 a plurality of slides on a carrier element retainment assembly;  
at least one reagent container; and  
a slide stain element configured to act upon said plurality of slides.
52. A automated sample processing system as described in claim 51 wherein said  
15 isolated electrical connection comprises an intermediate computer functionality.
53. A automated sample processing system as described in claim 52 wherein said  
intermediate computer response functionality comprises a separate full function  
computer programmed for operation with an automated slide processing system.  
20
54. A automated sample processing system as described in claim 53 wherein said  
intermediate computer response functionality comprises a server functionality.
55. A automated sample processing system as described in claim 54 and further  
25 comprising a plurality of client functionalities connected to said isolated electrical  
connection.
56. A automated sample processing system as described in claim 42, 46, or 51  
wherein said isolated electrical connection comprises a scalable connection.  
30
57. A automated sample processing system as described in claim 56 wherein said  
scalable connection comprises an address-based connection.
58. A automated sample processing system as described in claim 42, 46, or 51  
35 wherein said isolated electrical connection comprises:

- an address-based electronic communications prompt functionality on a separate full function computer electrically connected to said first stand alone automated sample processing system and said second stand alone automated sample processing system;
- 5 a request transfer functionality to which said first stand alone automated sample processing system is responsive;
- an address-based electronic communications prompt functionality on said first stand alone automated sample processing system; and
- a response transfer functionality to which said separate full function computer is responsive.
- 10
59. A automated sample processing system as described in claim 58 wherein said isolated electrical connection comprises a local area network.
- 15 60. A automated sample processing system as described in claim 59 wherein said local area network electronically comprises a system having a feature selected from a group consisting of:
- an Ethernet element, a token ring element, an arcnet element, a fiber distributed data interface element, an industry specification protocol, a bluetooth-based
- 20 element, a shared common link element, a transmission control protocol/internet protocol communication element, a packetized information protocol, a shared protocol, a proprietary protocol, and a layered protocol exchange system.
61. A automated sample processing system as described in claim 42, 46, or 51 and
- 25 further comprising an historical information generation element.
62. A automated sample processing system as described in claim 61 wherein said historical information generation element comprises:
- a first historical information storage element on said first stand alone automated
- 30 sample processing system; and
- a second historical information storage element on said second stand alone automated sample processing system.

63. A automated sample processing system as described in claim 62 and further comprising a separate electronic location historical information transfer functionality.
- 5 64. A automated sample processing system as described in claim 63 wherein said separate electronic location historical information transfer functionality comprises an automatic separate location availability monitor.
- 10 65. A automated sample processing system as described in claim 42, 46, 51, or 61 wherein said first stand alone automated sample processing system comprises an array of multiple memory elements for said first stand alone automated sample processing system, and wherein said second stand alone automated sample processing system comprises the an array of multiple memory elements for said second stand alone automated sample processing system.
- 15 66. A automated sample processing system as described in claim 65 wherein said array of multiple memory elements for said first stand alone automated sample processing system comprises the a mirrored array of multiple memory elements, and wherein said establishing an array of multiple memory elements for said second stand alone automated sample processing system comprises a mirrored array of multiple memory elements.
- 20 67. A automated sample processing system as described in claim 42, 46, or 51 wherein said first automated process functionality comprises:
- 25 a process interrupt functionality to which said first robotic motion system is responsive; and
- a process resume functionality to which said first robotic motion system is responsive,
- and wherein said second automated process functionality comprises:
- 30 a process interrupt functionality to which said second robotic motion system is responsive; and
- a process resume functionality to which said second robotic motion system is responsive.

68. A automated sample processing system as described in claim 67 and further comprising:  
a sample process change functionality; and  
a robotic sample process reschedule functionality responsive to said sample process change functionality.
69. A automated sample processing system as described in claim 67 and further comprising an additional buffer functionality responsive to said process interrupt functionality.
70. A automated sample processing system as described in claim 42, 46, 51, 61, or 67 wherein said isolated electrical connection comprises a physically separate system connection.
71. A automated sample processing system as described in claim 70 wherein said isolated electrical connection comprises an Internet connection.
72. A automated sample processing system as described in claim 70 wherein said isolated electrical connection comprises an Ethernet connection.
73. A automated sample processing system as described in claim 70 wherein said isolated electrical connection comprises a telephone connection.
74. A automated sample processing system as described in claim 70 wherein said isolated electrical connection comprises a connection to a separate room.
75. A automated sample processing system as described in claim 70 wherein said isolated electrical connection comprises a wireless connection.
76. A automated sample processing system as described in claim 70 wherein said isolated electrical connection comprises a bluetooth-based connection.
77. A automated sample processing system as described in claim 70 wherein said isolated electrical connection comprises an e-mail based connection.

78. A automated sample processing system as described in claim 70 wherein said isolated electrical connection comprises a hardwired connection.
79. A automated sample processing system as described in claim 42, 46, or 51 and further comprising an external network connection responsive to said isolated electrical connection.
80. A automated sample processing system as described in claim 79 and further comprising an isolation functionality between said isolated electrical connection and said external network.
81. A automated sample processing system as described in claim 79 wherein said external network connection comprises an office network connection.
81. A automated sample processing system as described in claim 79 or 81 wherein said external network connection comprises a laboratory information system connection.
83. A method of automated sample processing comprising the steps of:  
establishing an automated sample processing system having an automated process operation capability that causes automated process operation events through robotic sample process functions;  
transiently activating a remote information link with said automated sample processing system;  
transferring sample process information through said remote information link; and  
automatically processing at least one sample through operation of said robotic sample process functions.
84. A method of automated sample processing as described in claim 83 wherein said step of automatically processing at least one sample through operation of said robotic sample process functions comprises the step of responding to said remote information link.
85. A method of automated sample processing as described in claim 84 wherein said step of automatically processing at least one sample through operation of said

robotic sample process functions comprises the step of repetitively responding to said remote information link.

- 5 86. A method of automated sample processing as described in claim 83 or 84 wherein said step of establishing an automated sample processing system having an automated process operation capability that causes automated process operation events through robotic sample process functions comprises the step of establishing a stand alone automated sample processing system having an automated process operation capability that causes automated process operation events through robotic sample process functions.
- 10 87. A method of automated sample processing as described in claim 83 wherein said step of establishing an automated sample processing system having an automated process operation capability that causes automated process operation events through robotic sample process functions comprises the step of establishing an automated slide processing system.
- 15 88. A method of automated sample processing as described in claim 87 wherein said step of automatically processing at least one sample comprises the steps of:  
arranging a plurality of slides on a carrier retainment assembly;  
20 applying a reagent to said plurality of slides; and  
automatically staining said plurality of slides.
- 25 89. A method of automated sample processing as described in claim 88 wherein said step of establishing an automated sample processing system having an automated process operation capability that causes automated process operation events through robotic sample process functions comprises the steps of:  
establishing a plurality of automated slide stainers; and  
electronically connecting said plurality of automated slide stainers.
- 30 90. A method of automated sample processing as described in claim 83, 86, or 88 wherein said step of automatically processing through operation of said robotic sample process functions comprises the steps of:  
interrupting processing through operation of said first robotic sample process functions; and  
35

resuming processing through operation of said first robotic sample process functions.

- 5 91. A method of automated sample processing as described in claim 90 and further comprising the steps of:  
changing at least one aspect of sample processing; and  
rescheduling robotic sample process functions in response to said step of changing at least one aspect of sample processing.
- 10 92. A method of automated sample processing as described in claim 90 and further comprising the step of applying additional buffer to at least one sample in response to said step of changing at least one aspect of sample processing.
- 15 93. A method of automated sample processing as described in claim 83 or 88 wherein said step of transferring sample process information through said remote information link comprises the step of automatically transferring sample process information from said automated sample processing system through said remote information link.
- 20 94. A method of automated sample processing as described in claim 93 wherein said step of automatically transferring sample process information from said automated sample processing system through said remote information link comprises the step of automatically transferring sample process system diagnostic information from said automated sample processing system through said remote information link.
- 25 95. A method of automated sample processing as described in claim 93 wherein said step of automatically transferring sample process information from said automated sample processing system through said remote information link comprises the step of automatically transferring sample process system refill information from said automated sample processing system through said remote information link.
- 30 96. A method of automated sample processing as described in claim 93 wherein said step of automatically transferring sample process information from said automated sample processing system through said remote information link comprises the step

of automatically transferring sample process system inventory information from said automated sample processing system through said remote information link.

- 5 97. A method of automated sample processing as described in claim 93 wherein said step of automatically transferring sample process information from said automated sample processing system through said remote information link comprises the step of automatically transferring sample process system status information from said automated sample processing system through said remote information link.
- 10 98. A method of automated sample processing as described in claim 93 wherein said step of automatically transferring sample process information from said automated sample processing system through said remote information link comprises the step of automatically transferring real time status information from said automated sample processing system through said remote information link.
- 15 99. A method of automated sample processing as described in claim 93 wherein said step of automatically transferring sample process information from said automated sample processing system through said remote information link comprises the step of automatically transferring sample process system backup information from said automated sample processing system through said remote information link.
- 20 100. A method of automated sample processing as described in claim 93 wherein said step of automatically transferring sample process information from said automated sample processing system through said remote information link comprises the step of automatically notifying a person selected from a group consisting of:  
25 an instrument operator, an administrator, and a supplier,  
through said remote information link.
- 30 101. A method of automated sample processing as described in claim 83, 88, or 93 wherein said step of automatically transferring sample process information from said automated sample processing system through said remote information link comprises the step of transferring sample process information to said automated sample processing system through said remote information link.



102. A method of automated sample processing as described in claim 101 wherein said step of transferring sample process information to said automated sample processing system through said remote information link comprises the step of transferring off-site support information to said automated sample processing system through said remote information link.
103. A method of automated sample processing as described in claim 101 wherein said step of transferring sample process information to said automated sample processing system through said remote information link comprises the step of transferring sample input information to said automated sample processing system through said remote information link.
104. A method of automated sample processing as described in claim 101 wherein said step of transferring sample process information to said automated sample processing system through said remote information link comprises the step of transferring schedule input information to said automated sample processing system through said remote information link.
105. A method of automated sample processing as described in claim 101 wherein said step of transferring sample process information to said automated sample processing system through said remote information link comprises the step of transferring status information to said automated sample processing system through said remote information link.
106. A method of automated sample processing as described in claim 101 wherein said step of transferring sample process information to said automated sample processing system through said remote information link comprises the step of automatically transferring system update information to said automated sample processing system through said remote information link.
107. A method of automated sample processing as described in claim 98 and further comprising the steps of:  
transferring status information to said automated sample processing system through said remote information link; and

transferring sample input information to said automated sample processing system through said remote information link

108. A method of automated sample processing as described in claim 83, 88, or 101  
5 wherein said step of transiently activating a remote information link with said automated sample processing system comprises the step of establishing a physically separate system connection.
109. A method of automated sample processing as described in claim 108 wherein said  
10 step of establishing a physically separate system connection comprises the step of establishing an Internet connection.
110. A method of automated sample processing as described in claim 108 wherein said  
15 step of establishing a physically separate system connection comprises the step of establishing a telephone connection.
111. A method of automated sample processing as described in claim 108 wherein said  
20 step of establishing a physically separate system connection comprises the step of establishing a connection to a separate room.
112. A method of automated sample processing as described in claim 108 wherein said  
step of establishing a physically separate system connection comprises the step of establishing a wireless connection.
- 25 113. A method of automated sample processing as described in claim 108 wherein said step of establishing a physically separate system connection comprises the step of establishing a bluetooth-based connection.
114. A method of automated sample processing as described in claim 108 wherein said  
30 step of establishing a physically separate system connection comprises the step of establishing an e-mail based connection.
115. A method of automated sample processing as described in claim 108 wherein said  
35 step of establishing a physically separate system connection comprises the steps of:

prompting address-based electronic communications programming on a separate full function computer electrically connected to said automated sample processing system;

transferring said request for specific activity to said automated sample processing system across said remote information link;

conducting activity on said automated sample processing system as a result of said step of prompting electronic communications programming on a separate full function computer;

prompting address-based electronic communications programming on said automated sample processing system to respond to said request for specific activity from said separate full function computer; and

transferring said response to said request for specific activity to said automated sample processing system across said remote information link.

116. A method of automated sample processing as described in claim 108 wherein said step of establishing an automated sample processing system having an automated process operation capability that causes automated process operation events through robotic sample process functions comprises the steps of:

establishing a plurality of automated slide stainers; and

electronically connecting said plurality of automated slide stainers.

117. A method of automated sample processing as described in claim 115 wherein said step of establishing a physically separate system connection further comprises the step of utilizing a separate full function computer programmed for operation with an automated slide processing system.

118. A method of automated sample processing as described in claim 115 wherein said step of establishing a physically separate system connection further comprises the step of establishing a local area network.

119. A method of automated sample processing as described in claim 118 wherein said step of establishing a local area network electronically comprises the step of incorporating a system having a feature selected from a group consisting of:

an Ethernet element, a token ring element, an arcnet element, a fiber distributed data interface element, an industry specification protocol, a bluetooth-based

element, a shared common link element, a transmission control protocol/internet protocol communication element, a packetized information protocol, a shared protocol, a proprietary protocol, and a layered protocol exchange system.

- 5 120. An automated sample processing system comprising:  
at least one sample;  
an automated slide processing system having a robotic motion system to which  
said first sample is responsive;  
a transiently active remote information link with said automated sample  
10 processing system; and  
an automated process functionality to which said robotic motion system is  
responsive.
121. A automated sample processing system as described in claim 120 wherein said  
15 automated process functionality comprises a transient remote response  
functionality.
122. A automated sample processing system as described in claim 121 wherein said  
transient remote response functionality comprises a repetitive transient remote  
20 response functionality.
123. A automated sample processing system as described in claim 120 or 121 wherein  
said automated sample processing system comprises a stand alone automated  
sample processing system.  
25
124. A automated sample processing system as described in claim 120 wherein said  
automated sample processing system comprises an automated slide processing  
system.
- 30 125. A automated sample processing system as described in claim 124 wherein said  
automated slide processing system comprises:  
a plurality of slides on a carrier element retainment assembly;  
at least one reagent container; and  
a slide stain element configured to act upon said plurality of slides.
- 35

126. A automated sample processing system as described in claim 125 wherein said automated sample processing system comprises:  
a plurality of automated slide stainers; and  
an electronic connection to said plurality of automated slide stainers.
- 5
127. A automated sample processing system as described in claim 120, 123 or 125 wherein said automated process functionality comprises:  
a process interrupt functionality to which said robotic motion system is responsive; and  
10 a process resume functionality to which said robotic motion system is responsive.
128. A automated sample processing system as described in claim 127 and further comprising:  
a sample process change functionality; and  
15 a robotic sample process reschedule functionality responsive to said sample process change functionality.
129. A automated sample processing system as described in claim 127 and further comprising an additional buffer functionality responsive to said process interrupt functionality.  
20
130. A automated sample processing system as described in claim 120 or 125 and further comprising an automatic sample process information transfer functionality configured to transfer information from said automated sample processing system.  
25
131. A automated sample processing system as described in claim 130 wherein said automatic sample process information transfer functionality comprises an automatic sample process system diagnostic information transfer functionality.
- 30 132. A automated sample processing system as described in claim 130 wherein said automatic sample process information transfer functionality comprises an automatic sample process system refill information transfer functionality.

133. A automated sample processing system as described in claim 130 wherein said automatic sample process information transfer functionality comprises an automatic sample process system inventory information transfer functionality.
- 5 134. A automated sample processing system as described in claim 130 wherein said automatic sample process information transfer functionality comprises an automatic sample process system status information transfer functionality.
- 10 135. A automated sample processing system as described in claim 130 wherein said automatic sample process information transfer functionality comprises an automatic sample process system real time status information transfer functionality.
- 15 136. A automated sample processing system as described in claim 130 wherein said automatic sample process information transfer functionality comprises an automatic sample process system backup information transfer functionality.
- 20 137. A automated sample processing system as described in claim 130 wherein said automatic sample process information transfer functionality comprises an automatic notification functionality selected from a group consisting of: an instrument operator notification functionality, an administrator notification functionality, and a supplier notification functionality.
- 25 138. A automated sample processing system as described in claim 120, 125, or 130 and further comprising an automatic sample process information transfer functionality configured to transfer information to said automated sample processing system.
- 30 139. A automated sample processing system as described in claim 138 wherein said automatic sample process information transfer functionality comprises an off-site support information transfer functionality.
- 35 140. A automated sample processing system as described in claim 138 wherein said automatic sample process information transfer functionality comprises a sample input information transfer functionality.

141. A automated sample processing system as described in claim 138 wherein said automatic sample process information transfer functionality comprises a schedule input information transfer functionality.
- 5 142. A automated sample processing system as described in claim 138 wherein said automatic sample process information transfer functionality comprises a status information transfer functionality.
- 10 143. A automated sample processing system as described in claim 138 wherein said automatic sample process information transfer functionality comprises a system update information transfer functionality.
144. A automated sample processing system as described in claim 135 and further comprising:  
15 a status information transfer functionality; and  
a sample input information transfer functionality.
145. A automated sample processing system as described in claim 120, 125, or 138  
20 wherein said transiently active remote information link comprises a physically separate system connection.
143. A automated sample processing system as described in claim 145 wherein said physically separate system connection comprises an Internet connection.
- 25 147. A automated sample processing system as described in claim 145 wherein said physically separate system connection comprises a telephone connection.
148. A automated sample processing system as described in claim 145 wherein said  
30 physically separate system connection comprises a connection to a separate room.
149. A automated sample processing system as described in claim 145 wherein said  
physically separate system connection comprises a wireless connection.
150. A automated sample processing system as described in claim 145 wherein said  
35 physically separate system connection comprises an e-mail based connection.

151. A automated sample processing system as described in claim 145 wherein said isolated electrical connection comprises:  
an address-based electronic communications prompt functionality on a separate  
5 full function computer electrically connected to said first stand alone automated sample processing system and said second stand alone automated sample processing system;  
a request transfer functionality to which said first stand alone automated sample processing system is responsive;  
10 an address-based electronic communications prompt functionality on said first stand alone automated sample processing system; and  
a response transfer functionality to which said separate full function computer is responsive.
- 15 152. A automated sample processing system as described in claim 145 wherein said automated sample processing system comprises:  
a plurality of automated slide stainers; and  
an electronic connection to said plurality of automated slide stainers.
- 20 153. A automated sample processing system as described in claim 151 wherein said transiently active remote information link comprises a separate full function computer programmed for operation with an automated slide processing system.
- 25 154. A automated sample processing system as described in claim 151 and further comprising a local area network to which said automated sample processing system is connected.
- 30 155. A automated sample processing system as described in claim 154 wherein said local area network electronically comprises a system having a feature selected from a group consisting of:  
an Ethernet element, a token ring element, an arcnet element, a fiber distributed data interface element, an industry specification protocol, a bluetooth-based element, a shared common link element, a transmission control protocol/internet protocol communication element, a packetized information protocol, a shared  
35 protocol, a proprietary protocol, and a layered protocol exchange system.



156. A method of automated sample processing comprising the steps of:  
establishing an automated sample processing system having an automated process  
operation capability that causes automated process operation events through  
5 robotic sample process functions;  
activating a continuous physically remote information link with said automated  
sample processing system;  
continuously transferring sample process information through said continuous  
physically remote information link; and  
10 automatically processing at least one sample through operation of said robotic  
sample process functions in response to said continuously transfer of sample  
process information.
157. A method of automated sample processing as described in claim 156 wherein said  
15 step of automatically processing at least one sample through operation of said  
robotic sample process functions comprises the step of responding to said remote  
information link.
158. A method of automated sample processing as described in claim 157 wherein said  
20 step of automatically processing at least one sample through operation of said  
robotic sample process functions comprises the step of repetitively responding to  
said remote information link.
159. A method of automated sample processing as described in claim 156 or 157  
25 wherein said step of activating a continuous physically remote information link  
with said automated sample processing system comprises the steps of:  
prompting address-based electronic communications programming on a separate  
full function computer electrically connected to said automated sample processing  
system;  
30 transferring said request for specific activity to said automated sample processing  
system across said remote information link;  
conducting activity on said automated sample processing system as a result of said  
step of prompting electronic communications programming on a separate full  
function computer;

prompting address-based electronic communications programming on said automated sample processing system to respond to said request for specific activity from said separate full function computer; and

transferring said response to said request for specific activity to said automated sample processing system across said remote information link.

5

160. A method of automated sample processing as described in claim 156 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of activating a constantly available physically remote information link with said automated sample processing system

10

161. A method of automated sample processing as described in claim 156 or 157 wherein said step of establishing an automated sample processing system having an automated process operation capability that causes automated process operation events through robotic sample process functions comprises the step of establishing a stand alone automated sample processing system having an automated process operation capability that causes automated process operation events through robotic sample process functions.

15

20

162. A method of automated sample processing as described in claim 156, 157, or 159 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of utilizing a separate full function computer programmed for operation with an automated slide processing system.

25

163. A method of automated sample processing as described in claim 156, 157, or 159 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of utilizing a server functionality.

30

164. A method of automated sample processing as described in claim 156 or 162 wherein said step of establishing an automated sample processing system having an automated process operation capability that causes automated process operation events through robotic sample process functions comprises the steps of:

35

establishing a plurality of automated slide stainers; and  
electronically connecting said plurality of automated slide stainers.

165. A method of automated sample processing as described in claim 164 and further  
5 comprising the step of interacting between said plurality of automated sample  
processing systems.
166. A method of automated sample processing as described in claim 165 wherein said  
step of interacting between said plurality of automated sample processing systems  
10 comprises the step of communicating processing data between said plurality of  
automated sample processing systems.
167. A method of automated sample processing as described in claim 156, 162, or 164  
wherein said step of establishing an automated sample processing system having  
15 an automated process operation capability that causes automated process  
operation events through robotic sample process functions comprises the step of  
establishing an automated slide processing system.
168. A method of automated sample processing as described in claim 167 wherein said  
20 step of automatically processing at least one sample comprises the steps of:  
arranging a plurality of slides on a carrier retainment assembly;  
applying a reagent to said plurality of slides; and  
automatically staining said plurality of slides.
- 25 169. A method of automated sample processing as described in claim 168 wherein said  
step of establishing an automated sample processing system having an automated  
process operation capability that causes automated process operation events  
through robotic sample process functions comprises the steps of:  
establishing a plurality of automated slide stainers; and  
30 electronically connecting said plurality of automated slide stainers.
170. A method of automated sample processing as described in claim 168 wherein said  
step of establishing an automated sample processing system having an automated  
process operation capability that causes automated process operation events  
35 through robotic sample process functions comprises the step of establishing a

stand alone automated sample processing system having an automated process operation capability that causes automated process operation events through robotic sample process functions.

- 5 171. A method of automated sample processing as described in claim 168 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of utilizing a separate full function computer programmed for operation with an automated slide processing system.
- 10 172. A method of automated sample processing as described in claim 171 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of utilizing a server functionality.
- 15 173. A method of automated sample processing as described in claim 172 and further comprising the step of establishing a plurality of client functionalities connected to said isolated electrical connection.
- 20 174. A method of automated sample processing as described in claim 156, 162, or 168 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of establishing a scalable connection with said automated sample processing system.
- 25 175. A method of automated sample processing as described in claim 174 wherein said step of establishing a scalable connection among with said automated sample processing system comprises the step of establishing an address-based connection with said automated sample processing system.
- 30 176. A method of automated sample processing as described in claim 168 or 169 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the steps of:  
prompting address-based electronic communications programming on a separate full function computer electrically connected to said automated sample processing system to request specific activity on said automated sample processing system;
- 35

transferring said request for specific activity to said automated sample processing system across said remote information link;  
conducting activity on said automated sample processing system as a result of said step of prompting electronic communications programming on a separate full  
5 function computer;  
prompting address-based electronic communications programming on said automated sample processing system to respond to said request for specific activity from said separate full function computer; and  
transferring said response to said request for specific activity to said automated  
10 sample processing system across said remote information link.

- 15 177. A method of automated sample processing as described in claim 176 wherein said step of establishing a remote information link further comprises the step of establishing a local area network.
- 20 178. A method of automated sample processing as described in claim 176 wherein said step of establishing a local area network electronically comprises the step of incorporating a system having a feature selected from a group consisting of:  
an Ethernet element, a token ring element, an arcnet element, a fiber distributed data interface element, an industry specification protocol, a bluetooth-based element, a shared common link element, a transmission control protocol/internet protocol communication element, a packetized information protocol, a shared protocol, a proprietary protocol, and a layered protocol exchange system.
- 25 179. A method of automated sample processing as described in claim 156, 161, or 168 wherein said step of automatically processing through operation of said robotic sample process functions comprises the steps of:  
interrupting processing through operation of said robotic sample process functions; and  
30 resuming processing through operation of said robotic sample process functions.
180. A method of automated sample processing as described in claim 179 and further comprising the steps of:  
changing at least one aspect of sample processing; and

rescheduling robotic sample process functions in response to said step of changing at least one aspect of sample processing.

- 5 181. A method of automated sample processing as described in claim 179 and further comprising the step of applying additional buffer to at least one sample in response to said step of changing at least one aspect of sample processing.
- 10 182. A method of automated sample processing as described in claim 156, 162, or 168 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of establishing an Internet connection.
- 15 183. A method of automated sample processing as described in claim 156, 162, or 168 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of establishing an Ethernet connection.
- 20 184. A method of automated sample processing as described in claim 156, 162, or 168 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of establishing a telephone connection.
- 25 185. A method of automated sample processing as described in claim 156, 162, or 168 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of establishing a connection to a separate room.
- 30 186. A method of automated sample processing as described in claim 156, 162, or 168 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of establishing a wireless connection.
187. A method of automated sample processing as described in claim 156, 162, or 168 wherein said step of activating a continuous physically remote information link

with said automated sample processing system comprises the step of establishing a bluetooth-based connection.

188. A method of automated sample processing as described in claim 156, 162, or 168  
5 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of establishing an e-mail based connection.
189. A method of automated sample processing as described in claim 156, 162, or 168  
10 wherein said step of activating a continuous physically remote information link with said automated sample processing system comprises the step of establishing a hardwired connection.
190. An automated sample processing system comprising:  
15 at least one sample;  
an automated sample processing system having a robotic motion system to which said sample is responsive;  
a continuous physically remote information link to which said automated sample processing system is responsive; and  
20 an automated process functionality to which said robotic motion system is responsive.
191. A automated sample processing system as described in claim 190 wherein said  
25 automated process functionality comprises a physically remote information link response functionality.
192. A automated sample processing system as described in claim 191 wherein said  
remote information link comprises a repetitive physically remote information link response functionality.  
30
193. A automated sample processing system as described in claim 191 wherein said remote information link comprises:  
an address-based electronic communications prompt functionality on a separate full function computer electrically connected to said first stand alone automated

- sample processing system and said second stand alone automated sample processing system;
- a request transfer functionality to which said first stand alone automated sample processing system is responsive;
- 5 an address-based electronic communications prompt functionality on said first stand alone automated sample processing system; and
- a response transfer functionality to which said separate full function computer is responsive.
- 10 194. A automated sample processing system as described in claim 190 wherein said remote information link comprises a constantly available physically remote information link.
- 15 195. A automated sample processing system as described in claim 190 or 191 wherein said automated sample processing system comprises a stand alone automated sample processing system.
- 20 195. A automated sample processing system as described in claim 190, 191, or 193 wherein said remote information link comprises a separate full function computer programmed for operation with an automated slide processing system.
197. A automated sample processing system as described in claim 190, 191, or 193 wherein said remote information link comprises a server functionality.
- 25 198. A automated sample processing system as described in claim 190 or 196 wherein said automated sample processing system comprises:
- a plurality of automated slide stainers; and
- an electronic connection to said plurality of automated slide stainers.
- 30 199. A automated sample processing system as described in claim 198 and further comprising a processing system interaction functionality to which said plurality of automated sample processing systems are responsive.
- 35 200. A automated sample processing system as described in claim 199 wherein said processing system interaction functionality comprises a processing data



communication functionality between said plurality of automated sample processing systems.

202. A automated sample processing system as described in claim 190, 196 or 198  
5 wherein said automated sample processing system comprises an automated slide processing system.
203. A automated sample processing system as described in claim 201 wherein said automated slide processing system comprises:  
10 a plurality of slides on a carrier element retainment assembly;  
at least one reagent container; and  
a slide stain element configured to act upon said plurality of slides.
203. A automated sample processing system as described in claim 202 wherein said automated sample processing system comprises:  
15 a plurality of automated slide stainers; and  
an electronic connection to said plurality of automated slide stainers.
204. A automated sample processing system as described in claim 202 wherein said automated sample processing system comprises a stand alone automated sample processing system.  
20
205. A automated sample processing system as described in claim 202 wherein said remote information link comprises a separate full function computer programmed for operation with an automated slide processing system.  
25
206. A automated sample processing system as described in claim 205 wherein said remote information link comprises a server functionality.
- 30 207. A automated sample processing system as described in claim 206 and further comprising a plurality of client functionalities connected to said isolated electrical connection.
208. A automated sample processing system as described in claim 190, 196, or 202  
35 wherein said remote information link comprises a scalable connection.

209. A automated sample processing system as described in claim 208 wherein said scalable connection comprises an address-based connection.
- 5 210. A automated sample processing system as described in claim 202 or 203 wherein said remote information link comprises:  
an address-based electronic communications prompt functionality on a separate full function computer electrically connected to said automated sample processing system;  
10 a request transfer functionality to which said automated sample processing system is responsive;  
an address-based electronic communications prompt functionality on said automated sample processing system; and  
a response transfer functionality to which said separate full function computer is  
15 responsive.
211. A automated sample processing system as described in claim 210 wherein said remote information link comprises a local area network.
- 20 212. A automated sample processing system as described in claim 211 wherein said local area network electronically comprises a system having a feature selected from a group consisting of:  
an Ethernet element, a token ring element, an arcnet element, a fiber distributed data interface element, an industry specification protocol, a bluetooth-based  
25 element, a shared common link element, a transmission control protocol/internet protocol communication element, a packetized information protocol, a shared protocol, a proprietary protocol, and a layered protocol exchange system.
213. A automated sample processing system as described in claim 190, 196, or 202  
30 wherein said automated process functionality comprises:  
a process interrupt functionality to which said robotic motion system is responsive; and  
a process resume functionality to which said robotic motion system is responsive.

214. A automated sample processing system as described in claim 213 and further comprising:  
a sample process change functionality; and  
robotic sample process reschedule functionality responsive to said sample process  
change functionality.
215. A automated sample processing system as described in claim 213 and further comprising an additional buffer functionality responsive to said process interrupt functionality.
216. A automated sample processing system as described in claim 190, 196, 202, or 203 wherein said remote information link comprises an Internet connection.
217. A automated sample processing system as described in claim 190, 196, 202, or 203 wherein said remote information link comprises an Ethernet connection.
218. A automated sample processing system as described in claim 190, 196, 202, or 203 wherein said remote information link comprises a telephone connection.
219. A automated sample processing system as described in claim 190, 196, 202, or 203 wherein said remote information link comprises a connection to a separate room.
220. A automated sample processing system as described in claim 190, 196, 202, or 203 wherein said remote information link comprises a wireless connection.
221. A automated sample processing system as described in claim 190, 196, 202, or 203 wherein said remote information link comprises a bluetooth-based connection.
222. A automated sample processing system as described in claim 190, 196, 202, or 203 wherein said remote information link comprises an e-mail based connection.
223. A automated sample processing system as described in claim 190, 196, 202, or 203 wherein said remote information link comprises an hardwired connection.

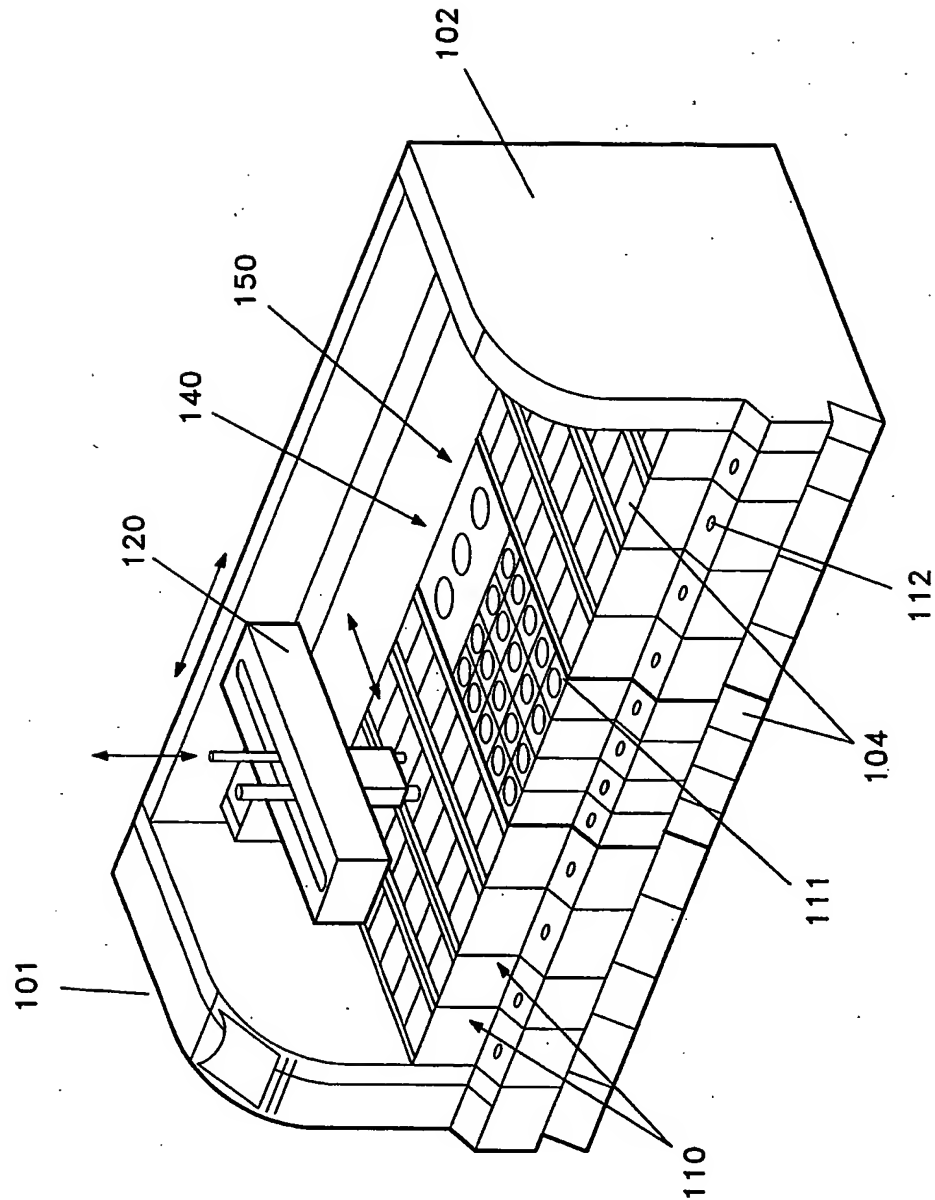


Fig. 1

2/11

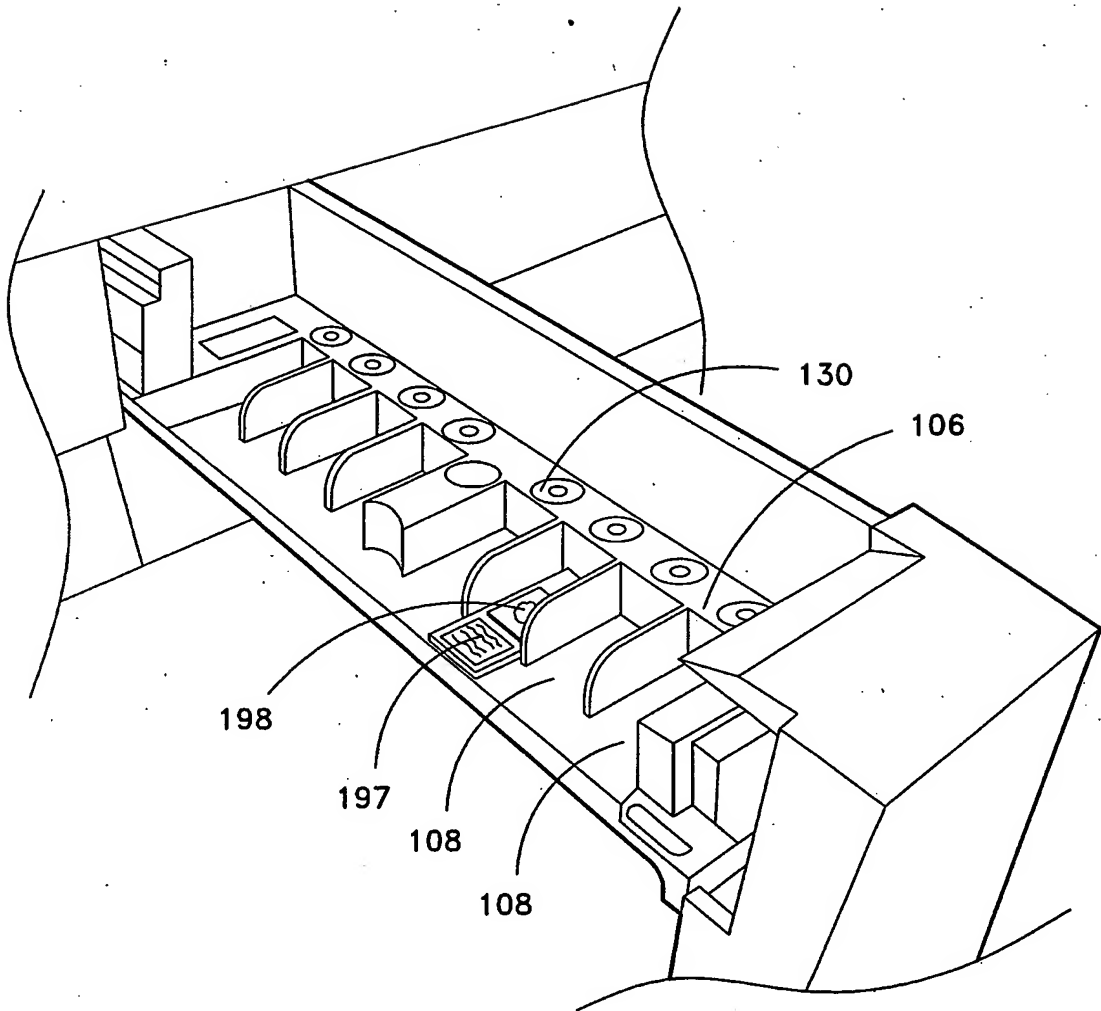


Fig. 2

3/11

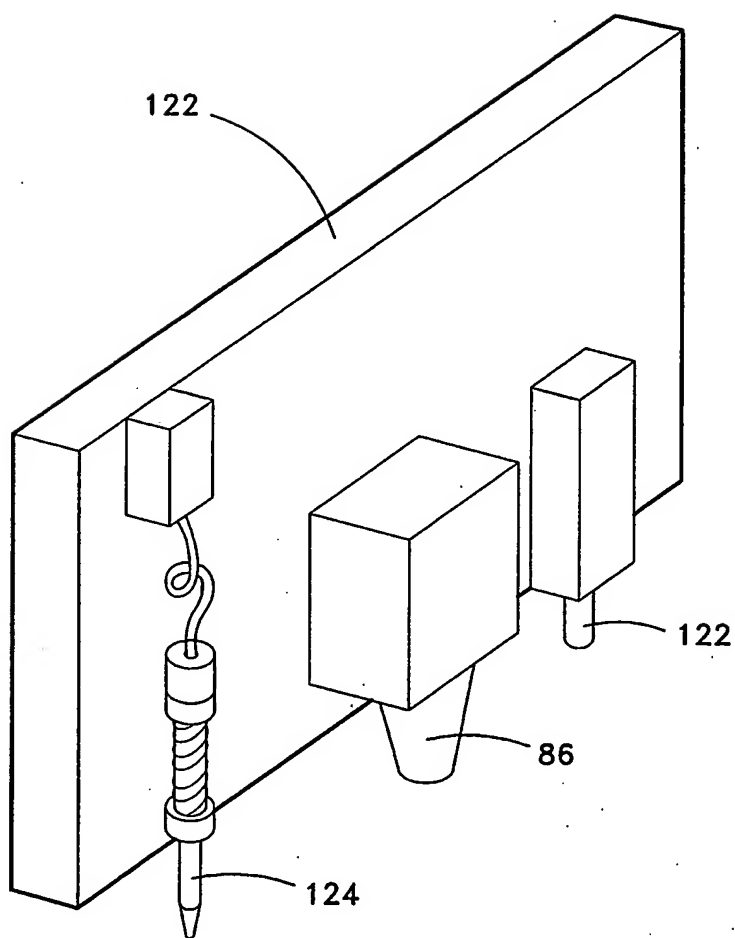


Fig. 3

4/11


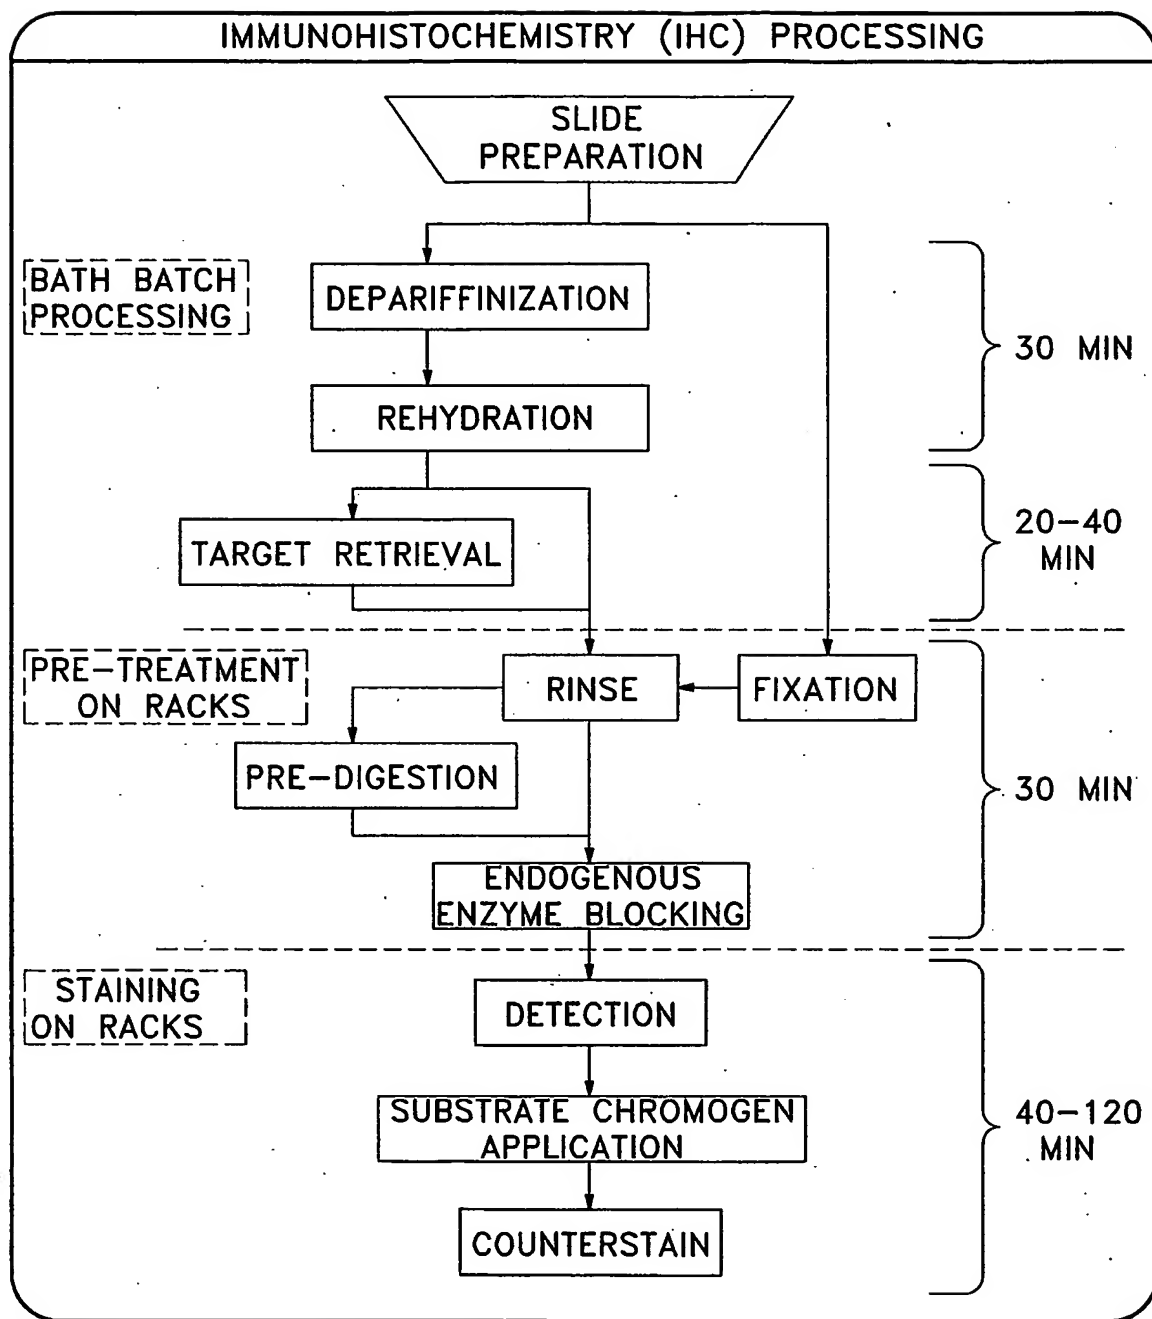


Fig. 4

5/11

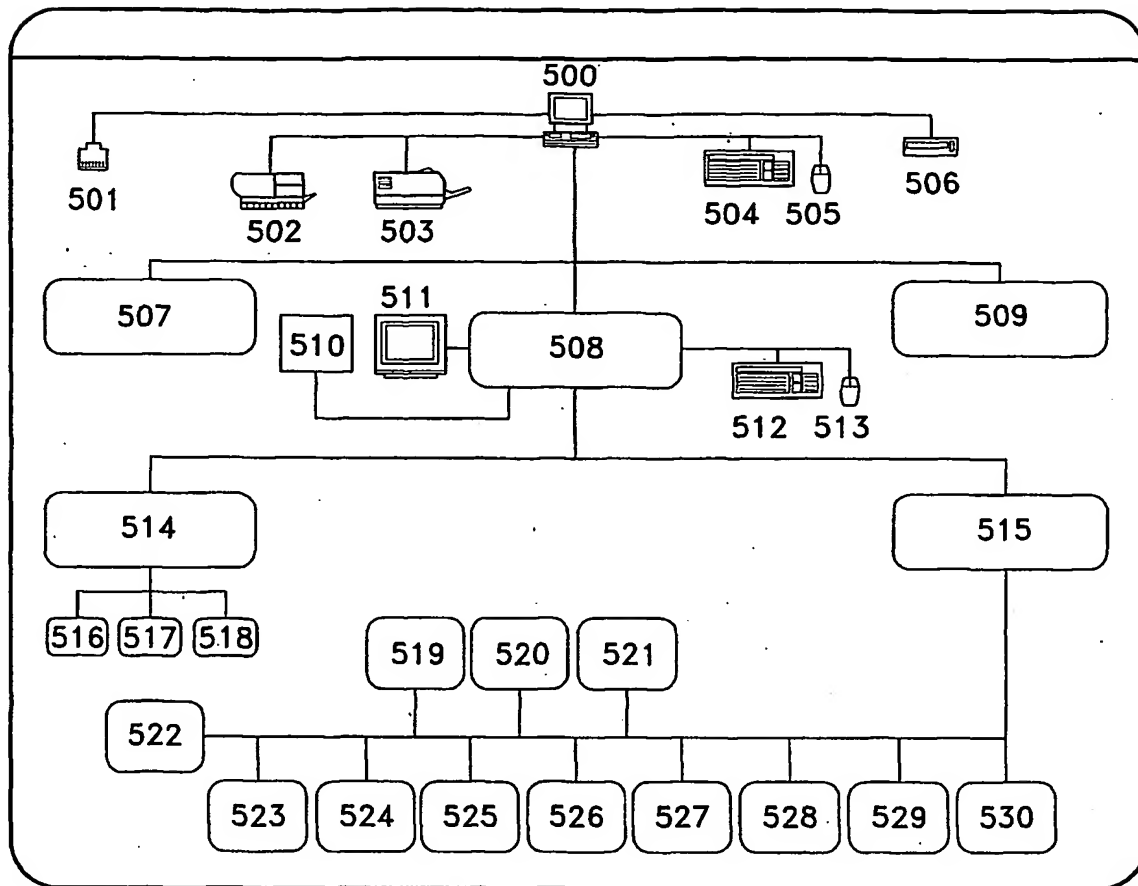

Key to Figure 5

500 Manager	516 X-Axis
501 100 BaseT	517 Y-Axis
502 Laser printer	518 Z-Axis
503 Data Matrix Label Printer	519 LCD Touch
504 Keyboard	520 Probe Wash/Swap
505 Mouse	521 Misc PCBA
506 Storage Media	522 Cart PCBA
507 Stainer A Embedded PC	523 Drawer 1 Control
508 Stainer B Embedded PC	524 Drawer 2 Control
509 Stainer C Embedded PC	525 Drawer 3 Control
510 Touch Screen	526 Drawer 4 Control
511 Monitor	527 Drawer 5 Control
512 Keyboard	528 Drawer 6 Control
513 Mouse	529 Drawer 7 Control
514 Motor Controller	530 Drawer 8 Control
515 Master PCBA	

Fig. 5



6/11

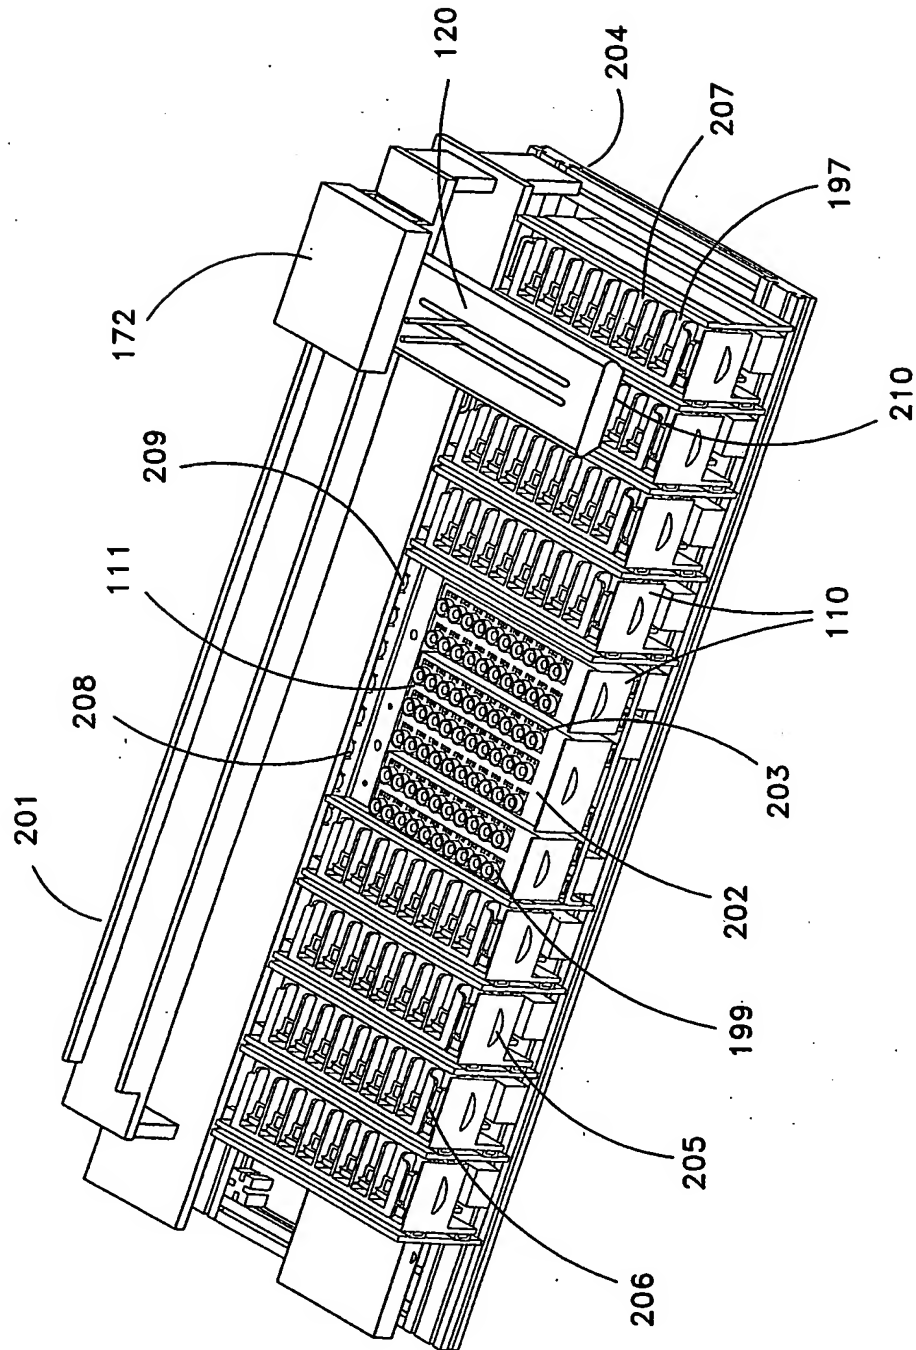


Fig. 6

7/11

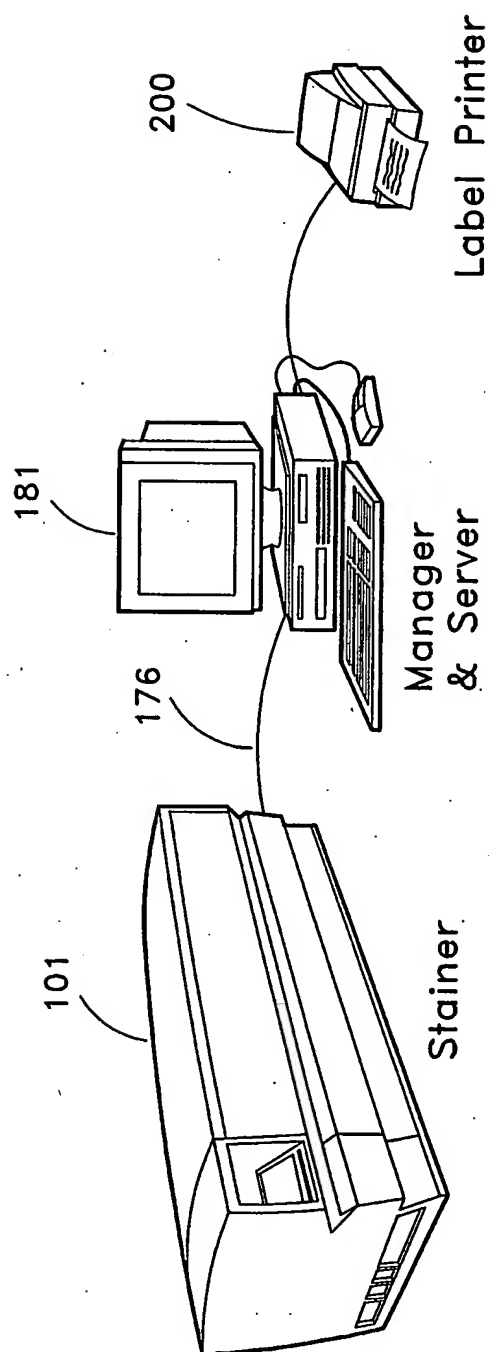


Fig. 7

8/11

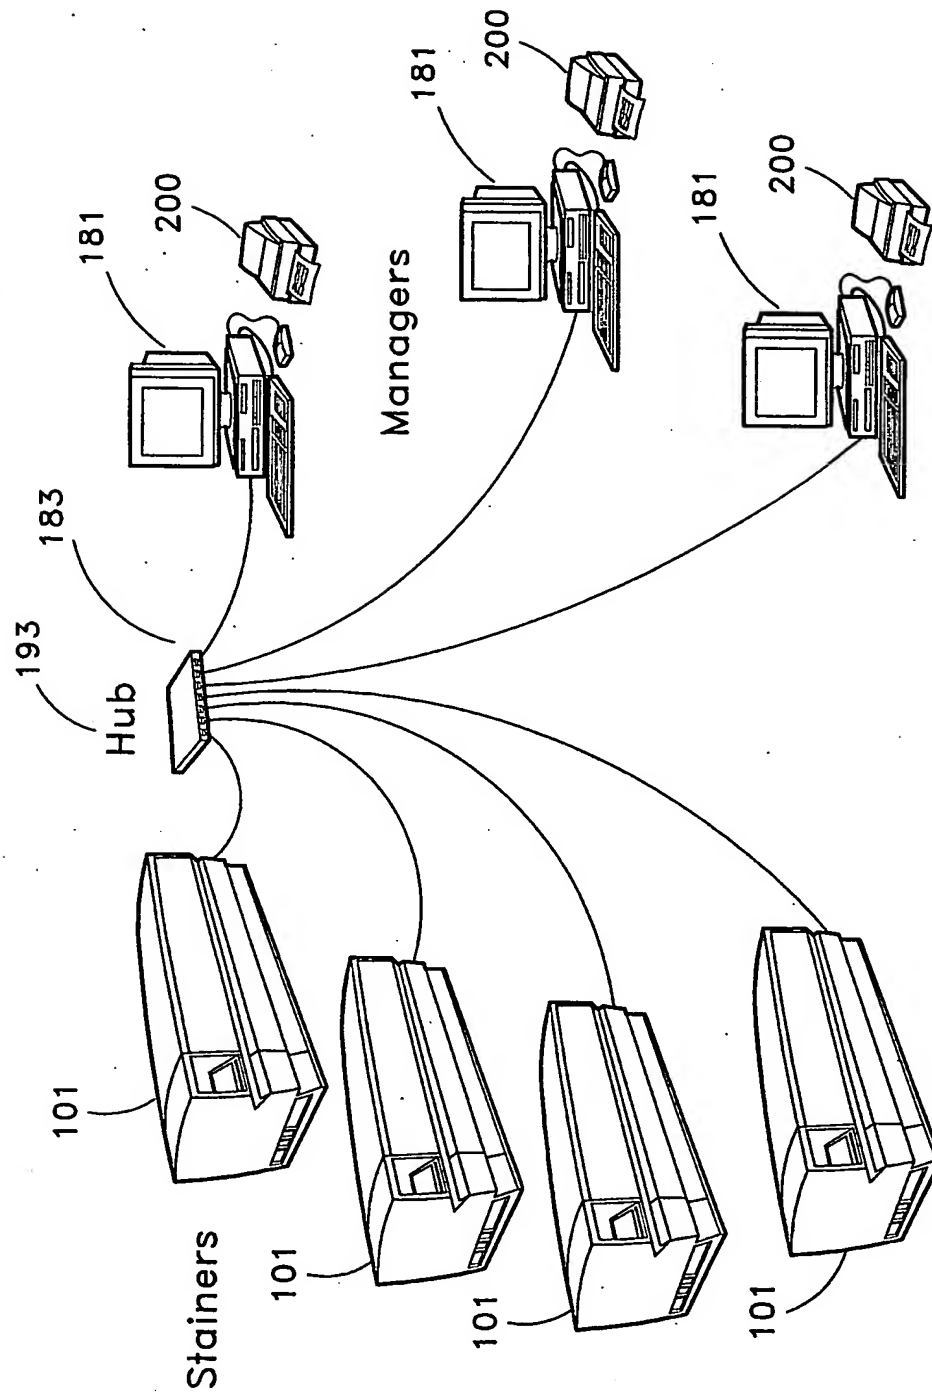


Fig. 8

9/11

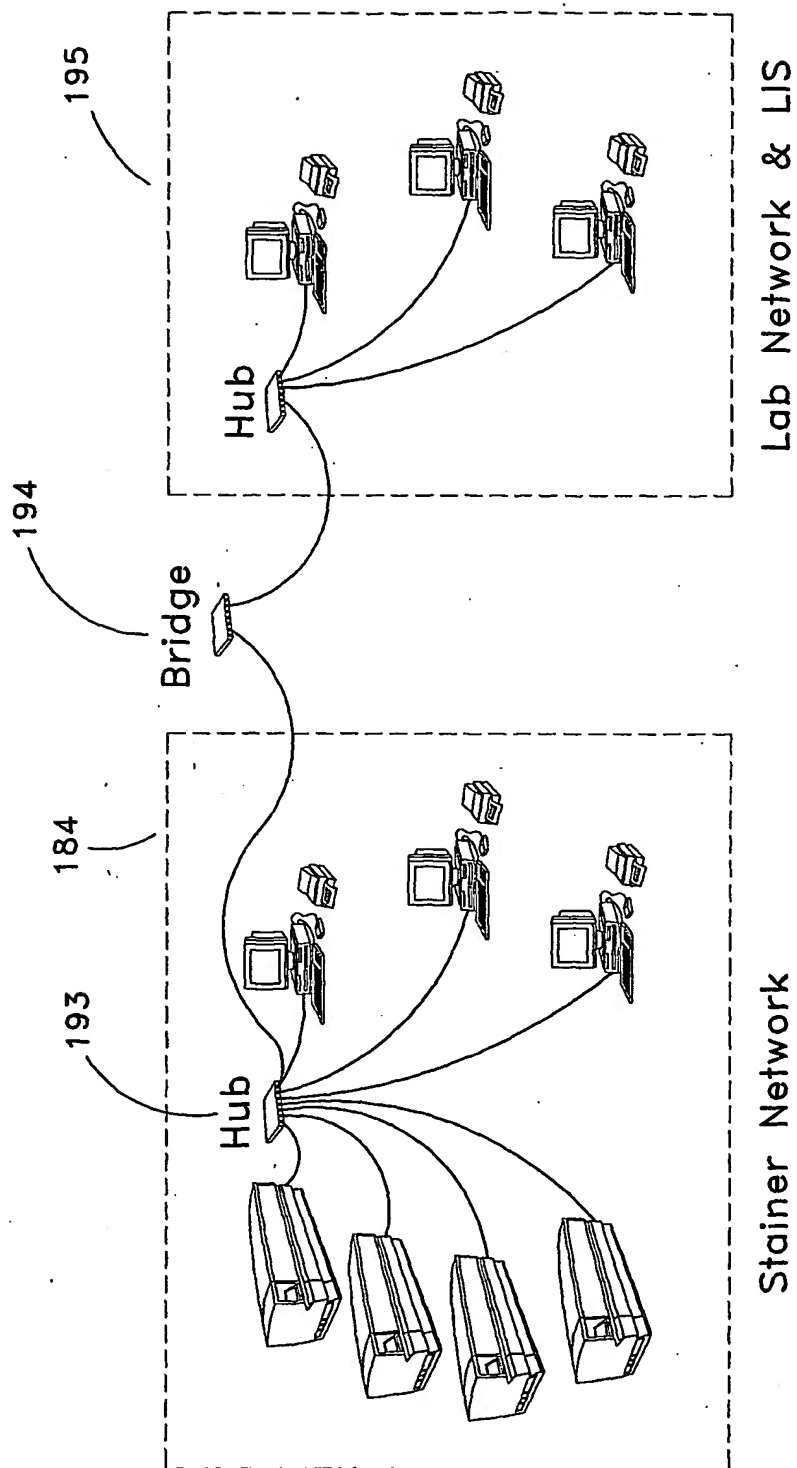


Fig. 9

10/11

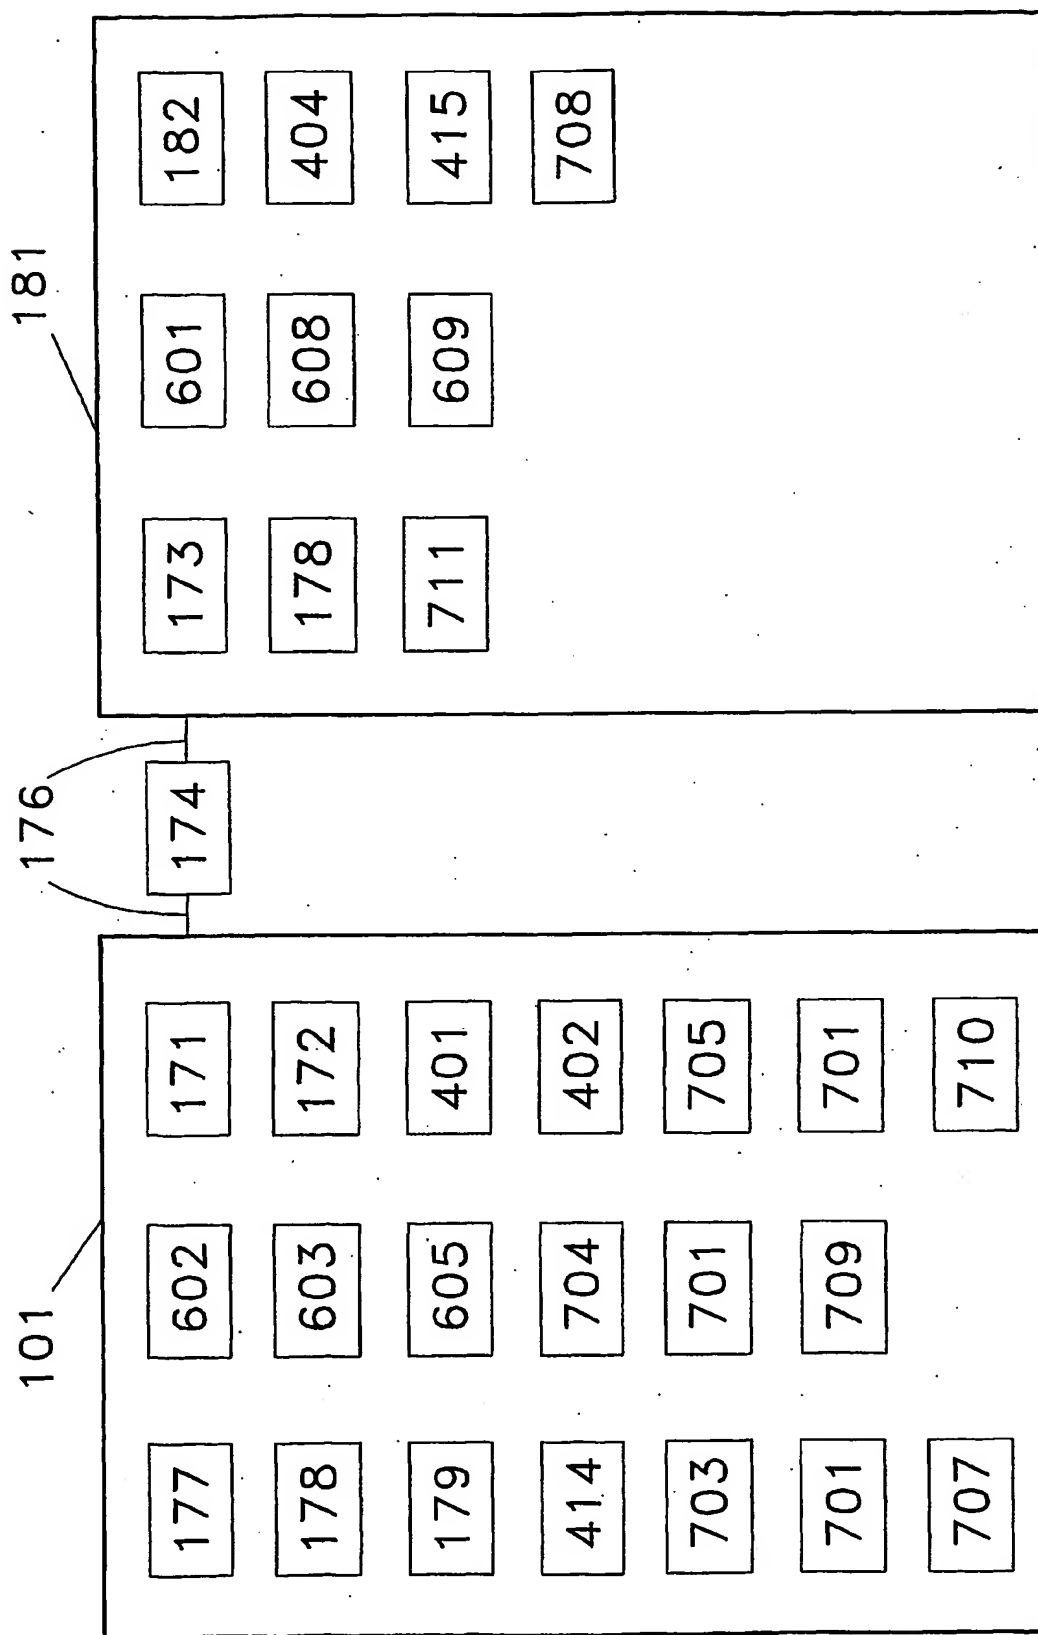


Fig. 10

11/11

## IHC Deparaffinization Process:

Process	Protocol Step	Time (min)	Temp C	Waste Segregation
Deparaffinization	Switch			Hazardous Waste
	Histoclear	5		
	Drain			
	Histoclear	5		
	Drain			
Re-Hydration	100% Ethanol	5		
	Drain			
	100% Ethanol	5		
	Drain			
	95% Ethanol	5		
	Drain			
	95% Ethanol	5		
	Rinse - Water	5		
	Switch			Non-Hazardous Waste
Target Retrieval	Target Retrieval	20	95	
	Target Retrieval Cool	20	55	
	Rinse - Water	5	RT	
Enzyme/Antibody Application	Peroxide Block	5		
	Enzyme Pretreatment	5		
	Rinse - Buffer			
	Pre-Diluted Antibody	10		
	Rinse - Buffer			
	EnVision-HRP	10		
Chromogen/ Counterstain Treatment	Rinse - Buffer			
	Switch			Hazardous Waste
	DAB	5		
	Rinse - Buffer			
	Hematoxylin	5		
	Rinse - Water			

Fig. 11